


E2M261



Female wirable connectors

WIRABLE SOCKET M16 4P FEMALE

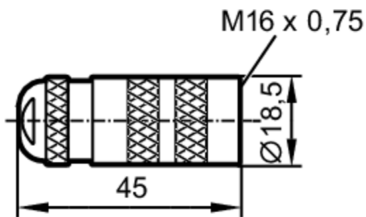

Application

System	gold-plated contacts
--------	----------------------

Electrical data

Operating voltage	[V]	< 250 DC
Protection class		III
Max. current load total	[A]	6

Operating conditions

Ambient temperature	[°C]	-30...95
Protection		IP 67
Degree of soiling		1

Mechanical data

Weight	[g]	38.2
Material		housing: brass nickel-plated; sealing: PBT
Molded-body material		brass, nickel-plated
Sealing material		PBT

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Socket

4 x 0.75 mm²; Cable sheath: Ø 4.1...7.8 mm

Connector: M16, straight; Moulded body: brass, nickel-plated; sealing: PBT; Contacts: gold-plated




E2M261



Female wirable connectors

WIRABLE SOCKET M16 4P FEMALE

Connection

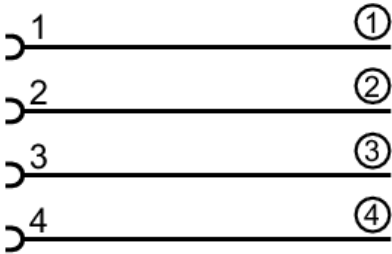

- | | |
|---|-----------------|
| 1 | coax cable core |
| 2 | coax screen |
| 3 | red |
| 4 | black |