




## Process adapter Varivent

ADAPT IFM-VARIV TYP F (D=50)3A

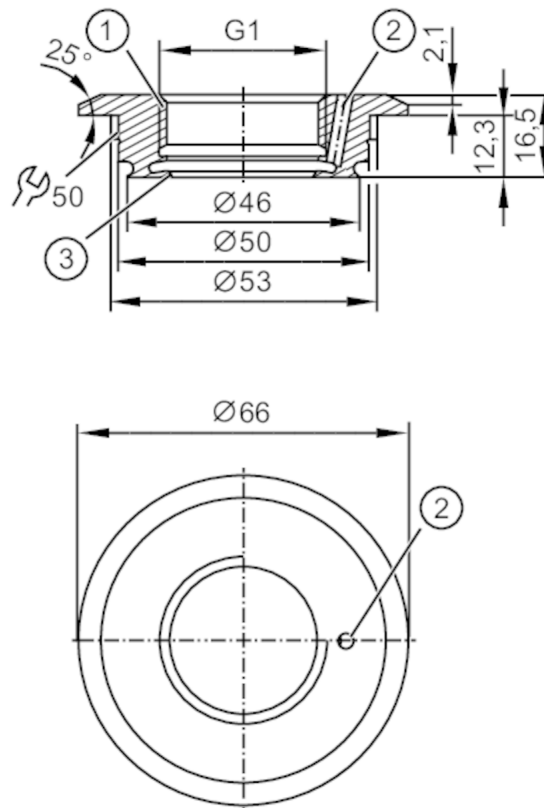

- 1 Aseptoflex Vario
- 2 Leakage port
- 3 sealing area



CRN EC 1935/2004 EHEDG Certified FCM FDA

## Application

|                                          |                        |         |
|------------------------------------------|------------------------|---------|
| Design                                   | with leakage port (3A) |         |
| Pressure rating                          | 25 bar                 | 2.5 MPa |
| MAWP (for applications according to CRN) | 25 bar                 | 2.5 MPa |

## Tests / approvals

|                              |                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------|
| Pressure equipment directive | A possible classification to PED depends on the application and has to be carried out by the user / operator. |
| Safety instructions          | The compatibility between medium and product material has to be checked in all applications.                  |

## Mechanical data

|                                       |                                                                                  |     |
|---------------------------------------|----------------------------------------------------------------------------------|-----|
| Weight                                | [g]                                                                              | 225 |
| Materials (wetted parts)              | stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm |     |
| Sensor connection                     | G 1 Internal thread Aseptoflex Vario                                             |     |
| Process connection                    | Varivent Form F, DN25 (1"), Ø 50 mm Ø 66 mm                                      |     |
| Sealing                               | Gasket                                                                           |     |
| Hygienic equipment class to DIN 11866 | H4                                                                               |     |

## Accessories

|                |                                                      |
|----------------|------------------------------------------------------|
| Items supplied | O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054 |
|----------------|------------------------------------------------------|

E33228



Process adapter Varivent

ADAPT IFM-VARIV TYP F (D=50)3A

|                        |                                                |
|------------------------|------------------------------------------------|
| Accessories (optional) | O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123 |
|                        | sealing ring: 1, PEEK, FDA compliant, E30124   |
| Remarks                |                                                |
| Pack quantity          | 1 pcs.                                         |