




Process adapter Varivent

ADAPT IFM-VARIV TYP N (D=68)3A

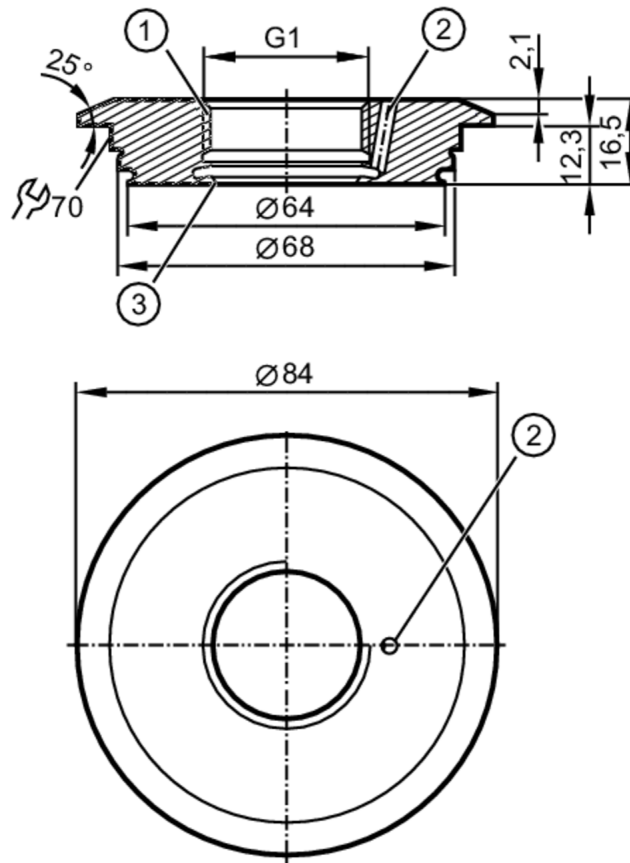

- 1 Aseptoflex Vario
2 Leakage port
3 sealing area



CRN EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port (3A)	
Pressure rating	25 bar	2.5 MPa
MAWP (for applications according to CRN)	25 bar	2.5 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight	[g]	462
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection	G 1 Internal thread Aseptoflex Vario	
Process connection	Varivent Form N, DN40...DN150 (1,5...6"), Ø 68 mm Ø 84 mm	
Sealing	Gasket	
Hygienic equipment class to DIN 11866	H4	

E33229



Process adapter Varivent

ADAPT IFM-VARIV TYP N (D=68)3A

Accessories	
Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123
	sealing ring: 1, PEEK, FDA compliant, E30124
Remarks	
Pack quantity	1 pcs.