




T-piece

T-ADAPT G1 DN25

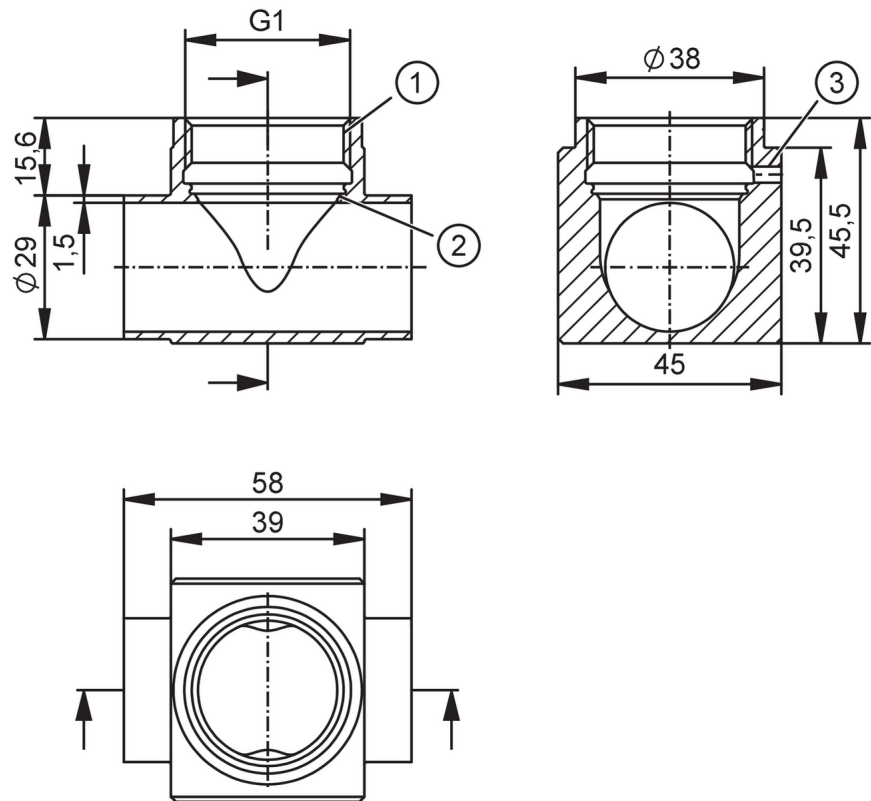

- 1 G1 Internal thread Aseptoflex Vario
- 2 sealing area
- 3 Leakage port



EC 1935/2004 FCM FCM JP FDA

Application		
Design	with leakage port	
Pressure rating	40 bar	4 MPa
Note on pressure rating	for the connection sensor - adapter	
Tests / approvals		
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	385
Materials (wetted parts)	housing: stainless steel (316L/1.4435) surface characteristics: Ra < 0,8 µm / Rz = 4 µm	
Sensor connection	G 1 internal thread Aseptoflex Vario	
Process connection	T-piece DN25 (29 x 1,5); Maße gemäß DIN 11866; Reihe A DIN	
Sealing	Gasket	
Accessories		
Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123	
Remarks		
Pack quantity	1 pcs.	