




T-piece

T-ADAPT G1 3/4" (ASME)

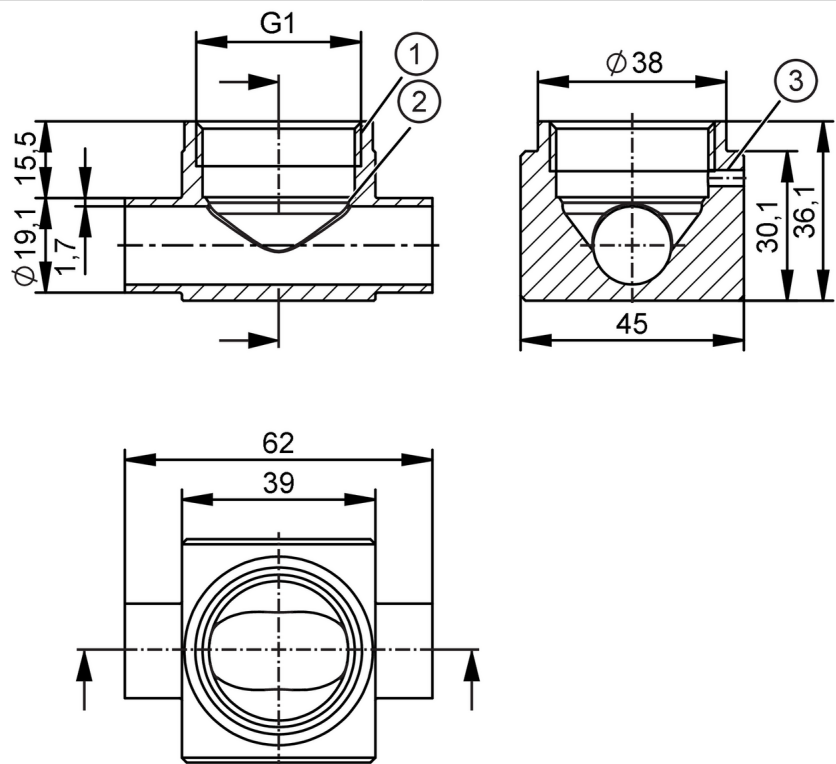

- 1 G1 internal thread Aseptoflex Vario
- 2 sealing area
- 3 Leakage port



EC 1935/2004 FCM FCM JP FDA

Application		
Design	with leakage port	
Pressure rating	40 bar	4 MPa
Note on pressure rating	for the connection sensor - adapter	
Tests / approvals		
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	357.1
Materials (wetted parts)	housing: stainless steel (316L/1.4435) surface characteristics: Ra < 0,8 µm / Rz = 4 µm	
Sensor connection	G 1 internal thread Aseptoflex Vario	
Process connection	T-piece 3/4" (19,05 x 1,65); Maße gemäß DIN 11866 series C - BPE	
Sealing	Gasket	
Accessories		
Items supplied	O-rings: 1 x (24 x 2 mm), EPDM, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, E30123	
Remarks		
Pack quantity	1 pcs.	