




T-piece

T-ADAPT G1 DN15

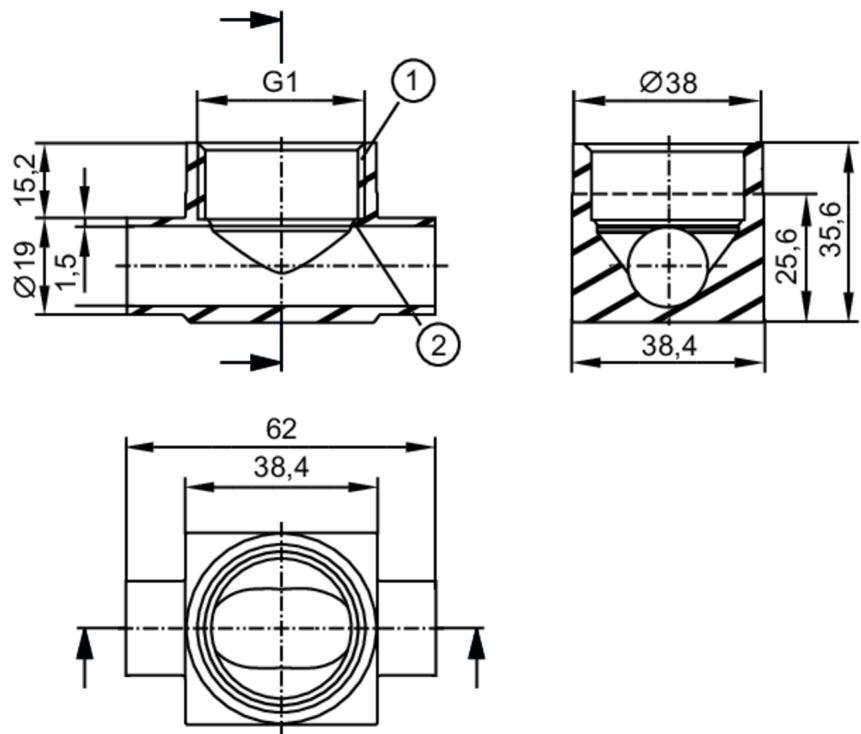

- 1 Aseptoflex Vario
- 2 sealing area



EC 1935/2004 FCM FDA

Application		
Design	with leakage port (3A)	
Pressure rating	25 bar	2.5 MPa
Note on pressure rating	for the connection sensor - adapter	
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	273.5
Materials (wetted parts)	T-piece: stainless steel (1.4404 / 316L) surface characteristics: Ra < 0,8 µm / Rz 4 µm	
Sensor connection	G 1 Aseptoflex Vario	
Process connection	T-piece DN15 (19 x 1,5); Maße gemäß DIN 11866; Reihe A DIN	
Sealing	Gasket	
Accessories		
Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123	
Remarks		
Pack quantity	1 pcs.	