




Process adapter DIN 11864

ADAPT DIN11864-3-A-BKS-A/DN50

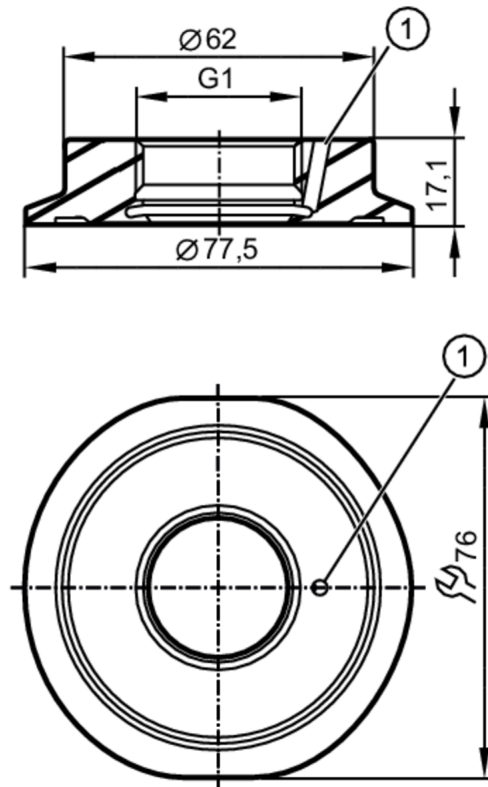

1 Leakage port



EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port (3A)	
Pressure rating	25 bar	2.5 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

Mechanical data

Weight	[g]	380.5
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection	G 1 Internal thread Aseptoflex Vario	
Process connection	Clamp DN50 Ø 77.5 mm DIN 11864-3-A-BKS	
Sealing	Gasket	

Accessories

Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123	
	sealing ring: 1, PEEK, FDA compliant, E30124	

Remarks

Pack quantity	1 pcs.
---------------	--------