


E33403



Screw-in adapter for process sensors

ADAPT G1/2-ASEPTOFLEX

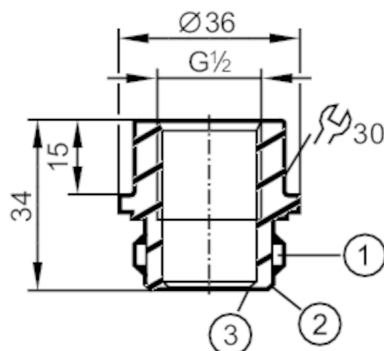

- 1 Aseptoflex thread
- 2 sealing area Aseptoflex adapter
- 3 Dichtkante sensor



EC 1935/2004 FCM FDA

Application

Pressure rating	50 bar	5 MPa
-----------------	--------	-------

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g]	187
Material	Adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm
Sensor connection	G 1/2 sealing cone
Process connection	threaded connection Aseptoflex
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz = 4 µm

Remarks

Pack quantity	1 pcs.
---------------	--------