


E3M122



Connection cable

MCI CONNECTION CABLE 2M

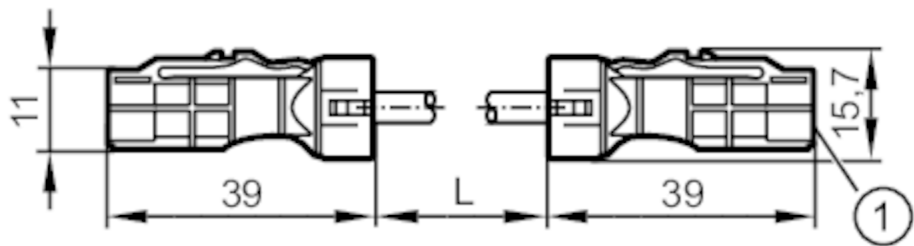

1 MCI



Application

System Drag chain suitability

Electrical data

Operating voltage [V] < 25 AC / < 60 DC

Operating conditions

Ambient temperature [°C] -40...105

Protection IP 67

Mechanical data

Weight [g] 89.15

Drag chain suitability yes

Drag chain suitability Bending radius for fixed installation ≥ 40 mm

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 2 m, TPU (urethane), black