


E3M152



Connection cable

CONNECTION CABLE M12 11M

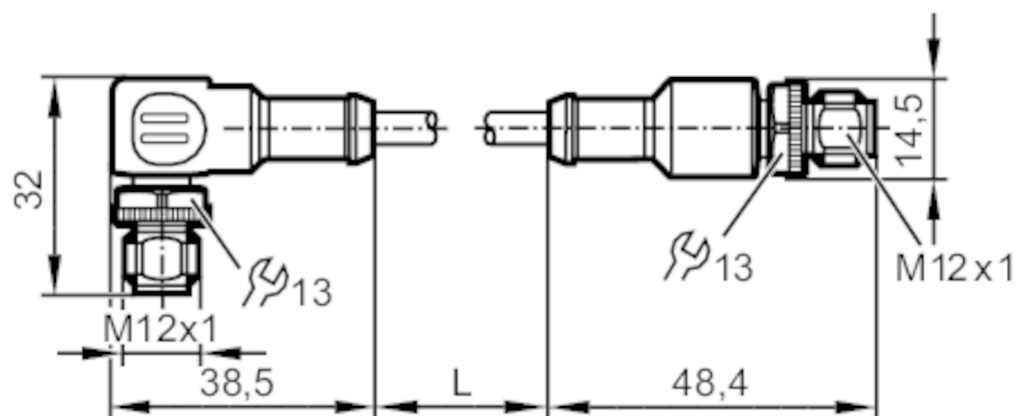

Application

System	screened cable; Drag chain suitability
Design	for 3D Smart sensor mobile with analog video output PAL

Electrical data

Operating voltage	[V]	< 25 AC / < 60 DC
Protection class		III

Operating conditions

Ambient temperature	[°C]	-40...80
Protection		IP 67; IP 69K

Mechanical data

Weight	[g]	562.5
Material		housing: PUR; sealing: FKM; contact pins: CuSn6 nickel-plated and tin-plated
Material nut		stainless steel (1.4305 / 303)
Drag chain suitability		yes
Drag chain suitability	Bending radius for fixed installation	≥ 60 mm

Remarks

Pack quantity		1 pcs.
---------------	--	--------

E3M152




Connection cable

CONNECTION CABLE M12 11M

Electrical connection - plug


Connector: 1 x M12, angled; coding: A; Locking: stainless steel (1.4305 / 303)



Electrical connection

Cable: 11 m, black, Ø 6 mm, screened; 3 x 0.25 mm²

Connection

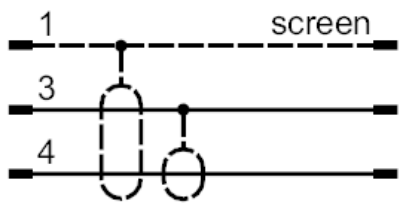

- | | |
|----|-----------------|
| 1: | screen |
| 2: | not used |
| 3: | coax screen |
| 4: | coax cable core |
| 5: | not used |

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Locking: stainless steel (1.4305 / 303)

