


E3M159



Extension cord

CONNECTION CABLE M12 5M EXT.

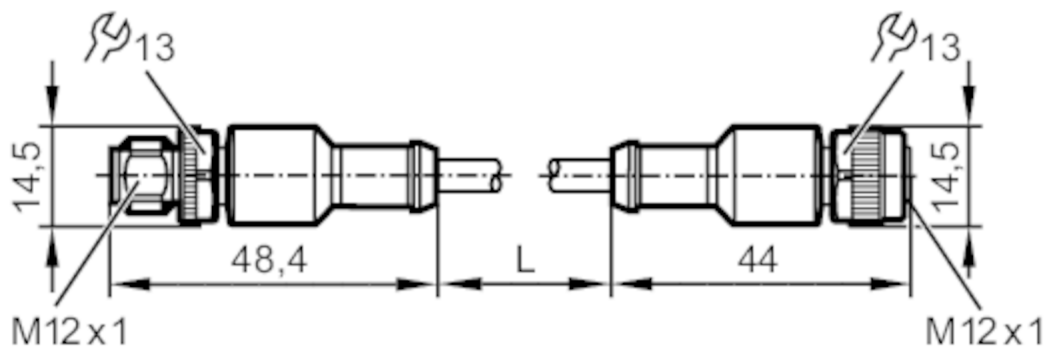

Application		
System	screened cable; Drag chain suitability	
Design	extension for O3M connection cable for 3D Smart sensor mobile with analog video output PAL	
Electrical data		
Operating voltage	[V]	< 25 AC / < 60 DC
Protection class	III	
Operating conditions		
Ambient temperature	[°C]	-40...80
Protection	IP 67; IP 69K	
Mechanical data		
Weight	[g]	274.3
Dimensions	[mm]	14.5 x 14.5 x 48.4
Material	housing: PUR; sealing: FKM; contact pins: CuSn6 nickel-plated and tin-plated	
Material nut	stainless steel (1.4305 / 303)	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for fixed installation	≥ 60 mm
Remarks		
Pack quantity	1 pcs.	

E3M159



Extension cord


CONNECTION CABLE M12 5M EXT.

Electrical connection

Cable: 5 m, TPU (urethane), black, Ø 6 mm, screened; Impedance 75 Ω


Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Locking: stainless steel (1.4305 / 303)




Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Locking: stainless steel (1.4305 / 303)



Connection

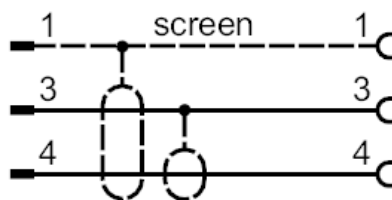

- | | |
|----|-----------------|
| 1: | screen |
| 2: | not used |
| 3: | coax screen |
| 4: | coax cable core |
| 5: | not used |