


E3R108



Connection cable

ADAPTER HFM Y CABLE / 1 X FAKRA 3D

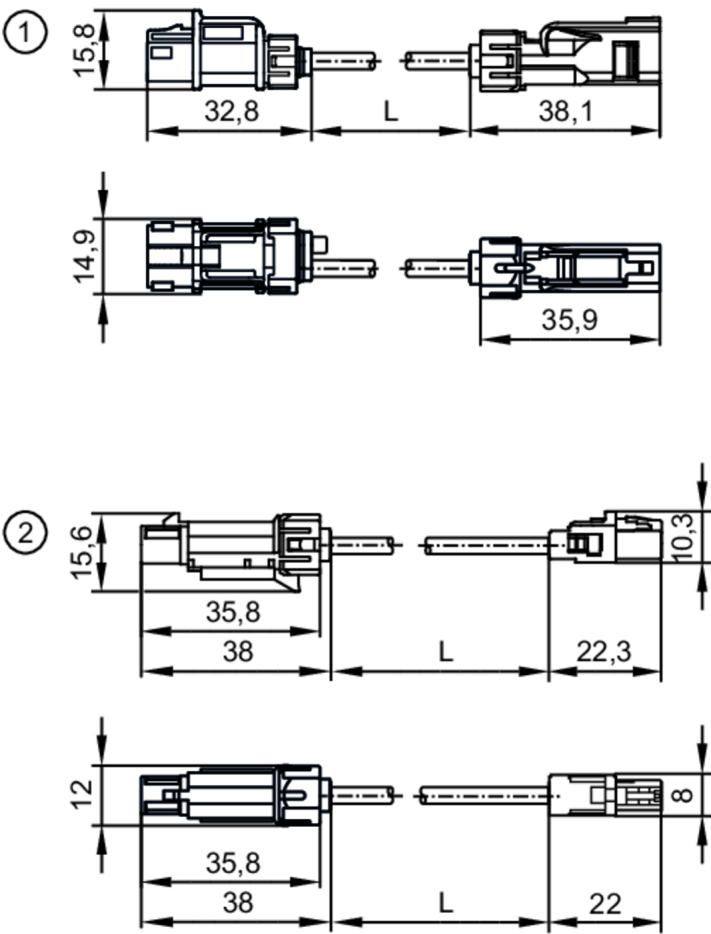

Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Damping	[dB/m]	1.6
Internal resistance (Ri)	[Ω]	50; (± 3 %)
Operating conditions		
Ambient temperature	[°C]	-10...60
Ambient temperature (moving)	[°C]	-10...60
Protection		IP 54
Mechanical data		
Weight	[g]	34.5
Material		housing: PBT-GF20
Feste Verlegung		
Min. bending radius	[mm]	19.8
Lose Verlegung		
Min. bending radius	[mm]	56

E3R108



Connection cable

ADAPTER HFM Y CABLE / 1 X FAKRA 3D

Remarks	
Pack quantity	1 pcs.
Electrical connection - 2D/3D camera	
Connector: 1 x HFM-Dual, straight	
Electrical connection	
Cable: 0.3 m, black, Ø 3.3 mm	
Electrical connection - Video Processing Unit	
Connector: 1 x HFM-Dual, straight; to HF Single, straight	