


E3R111



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 10M

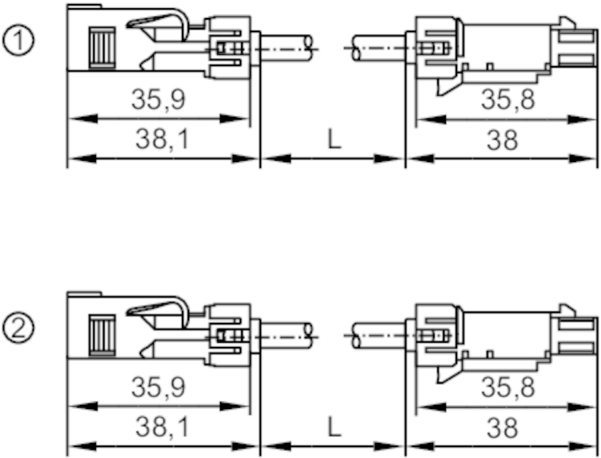

- 1 2D Cable
- 2 3D Cable



Application

System	Drag chain suitability
Oil resistant	yes

Electrical data

Operating voltage [V]	< 50 AC / < 60 DC
Protection class	III
Damping [dB/m]	1.6
Internal resistance (Ri) [Ω]	50; ($\pm 3 \Omega$)

Operating conditions

Ambient temperature [$^{\circ}\text{C}$]	-10...60
Ambient temperature (moving) [$^{\circ}\text{C}$]	-10...60
Protection	IP 54

Mechanical data

Weight [g]	660.4
Material	Cable: PUR black
Drag chain suitability	yes
Drag chain suitability	Bending radius for flexible applications 85 mm
	Bending radius for fixed installation 60 mm
	Bending radius 80 mm
	Bending cycles 2.000.000
	Travel speed max. 4 m/s at 4 m horizontal travel length and max. acceleration of 8 m/s ²

Accessories

Accessory required	Adapter cable, E3R106
--------------------	-----------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

E3R111



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 10M

Electrical connection

Connector: 2 x HF-Single, straight

Electrical connection

Cable: 10 m, black, Ø 5.6 mm