


E3R112



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 15M

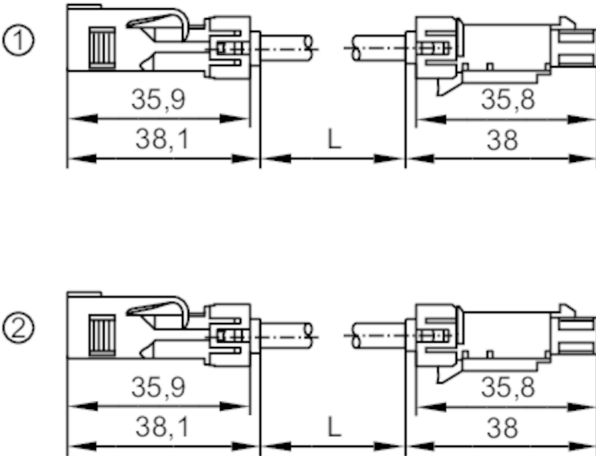

- 1 2D Cable
- 2 3D Cable



Application		
System	Drag chain suitability	
Oil resistant	yes	
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Damping	[dB/m]	1.6
Internal resistance (Ri)	[Ω]	50; (± 3 Ω)
Operating conditions		
Ambient temperature	[°C]	-10...60
Ambient temperature (moving)	[°C]	-10...60
Protection		IP 54
Mechanical data		
Weight	[g]	1008.4
Material		Cable: PUR black
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	85 mm
	Bending radius for fixed installation	60 mm
	Bending radius	80 mm
	Bending cycles	2.000.000
	Travel speed	max. 4 m/s at 4 m horizontal travel length and max. acceleration of 8 m/s²
Accessories		
Accessory required	Adapter cable, E3R106	
Remarks		
Pack quantity	1 pcs.	

E3R112



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 15M

Electrical connection

Connector: 2 x HF-Single, straight

Electrical connection

Cable: 15 m, black, Ø 5.6 mm