


E3R113



Connection cable

HF FAKRA CABLE 1x S/S/M S/S/F A DRAG 5M

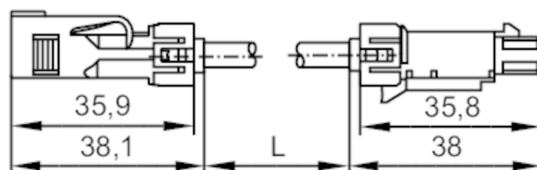

Application		
System		Drag chain suitability
Oil resistant		yes
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Damping	[dB/m]	1.6
Internal resistance (Ri)	[Ω]	50; (± 3 Ω)
Operating conditions		
Ambient temperature	[°C]	-10...60
Ambient temperature (moving)	[°C]	-10...60
Protection		IP 54
Mechanical data		
Weight	[g]	276.55
Material		Cable: PUR black
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	85
	Bending radius for fixed installation	60
	Bending radius	80
	Bending cycles	2.000.000
	Travel speed	max. 4 m/s at 4 m horizontal travel length and max. acceleration of 8 m/s ²
Feste Verlegung		
Min. bending radius	[mm]	19.8
Lose Verlegung		
Min. bending radius	[mm]	56
Accessories		
Accessory required		Adapter cable, E3R108
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x HF-Single, straight		

E3R113



Connection cable

HF FAKRA CABLE 1x S/S/M S/S/F A DRAG 5M

Electrical connection

Cable: 5 m, black, Ø 5.6 mm