




# Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN15

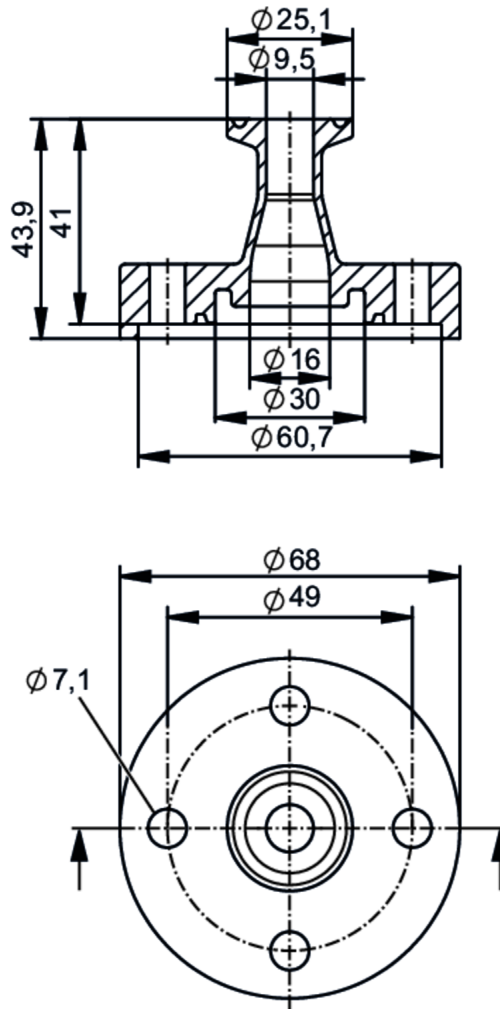

## Application

|                 |                                              |         |
|-----------------|----------------------------------------------|---------|
| Design          | for flow meter SMF                           |         |
| Application     | food and beverage industry; hygienic systems |         |
| Pressure rating | 16 bar                                       | 1.6 MPa |

## Tests / approvals

|                              |                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------|
| Pressure equipment directive | A possible classification to PED depends on the application and has to be carried out by the user / operator. |
| Safety instructions          | The compatibility between medium and product material has to be checked in all applications.                  |

## Mechanical data

|                   |      |                                 |
|-------------------|------|---------------------------------|
| Weight            | [g]  | 1080                            |
| Housing           |      | tubular                         |
| Dimensions        | [mm] | $\varnothing 68$ / L = 43.9     |
| Material          |      | stainless steel (1.4404 / 316L) |
| Nominal diameter  |      | DN15 (1/2")                     |
| Sensor connection |      | ifm-specific device flange      |

E40610



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN15

|                                                   |                                               |
|---------------------------------------------------|-----------------------------------------------|
| Process connection                                | Clamp DIN 32676 series C (ASME BPE)           |
| Process connection suitable for pipe standard     | (DIN EN 10357 series C); (DIN 11866 series C) |
| Surface characteristics Ra/Rz of the wetted parts | Ra < 0.4 µm                                   |
| Accessories                                       |                                               |
| Items supplied                                    | screws 8                                      |
| Remarks                                           |                                               |
| Pack quantity                                     | 2 pcs.                                        |