




Screw-in adapter for process sensors

ADAPT G1/2-G1 ASEPTOFLEX VARIO

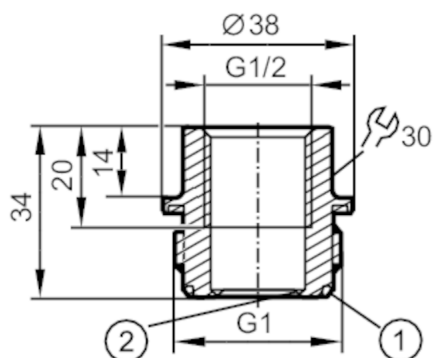

- 1 sealing Aseptoflex Vario adapter
2 Sealing edge sensor

EC 1935/2004 

Application

Pressure rating	50 bar	5 MPa
-----------------	--------	-------

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
------------------------------	---

Safety instructions	The compatibility between medium and product material has to be checked in all applications.
---------------------	--

Mechanical data

Weight [g]	220.5
Material	Adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm
Sensor connection	G 1/2 sealing cone
Process connection	threaded connection G 1 external thread Aseptoflex Vario
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz = 4 µm

Remarks

Pack quantity	1 pcs.
---------------	--------