




Welding adapter for process sensors

WELDING ADAPT G1/2 D85X34 V4A/3A

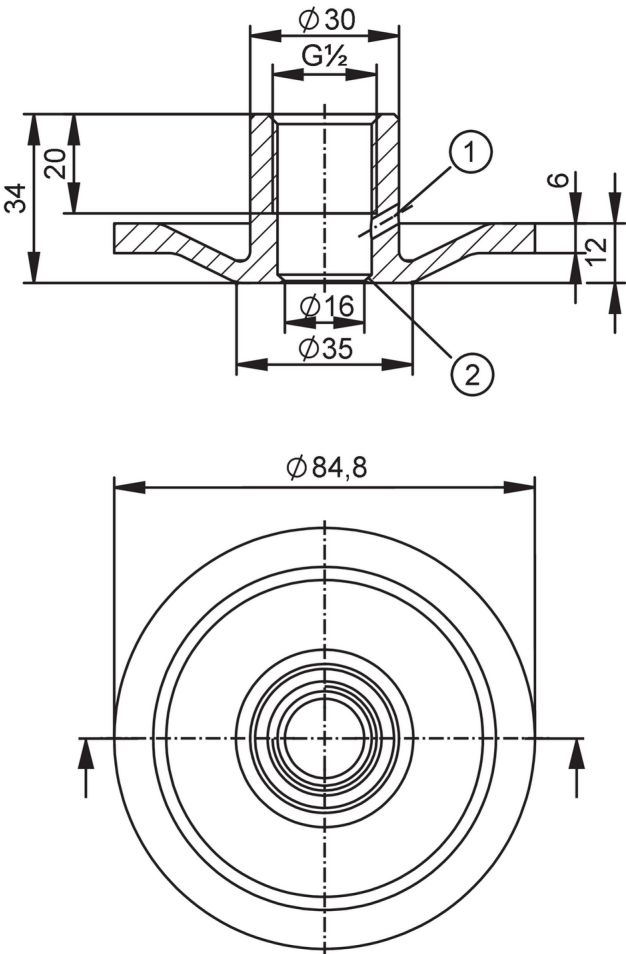

- 1 Leakage port
- 2 Sealing edge



Application	
Design	with leakage port (3A)
Installation	recommended for wall thickness <= 6 mm and for unfavourable welding conditions
Pressure rating	50 bar 5 MPa
Note on pressure rating	for the connection sensor - adapter
Tests / approvals	
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.
Mechanical data	
Weight [g]	383.1
Materials (wetted parts)	Welding adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm
Sensor connection	G 1/2 sealing cone
Process connection	Welding adapter Ø 84,8 mm
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz < 4 µm

E43918



Welding adapter for process sensors

WELDING ADAPT G1/2 D85X34 V4A/3A

Remarks	
Pack quantity	1 pcs.