




Welding adapter for process sensors

WELDING ADAPT G1/2 D85X44 V4A/3A

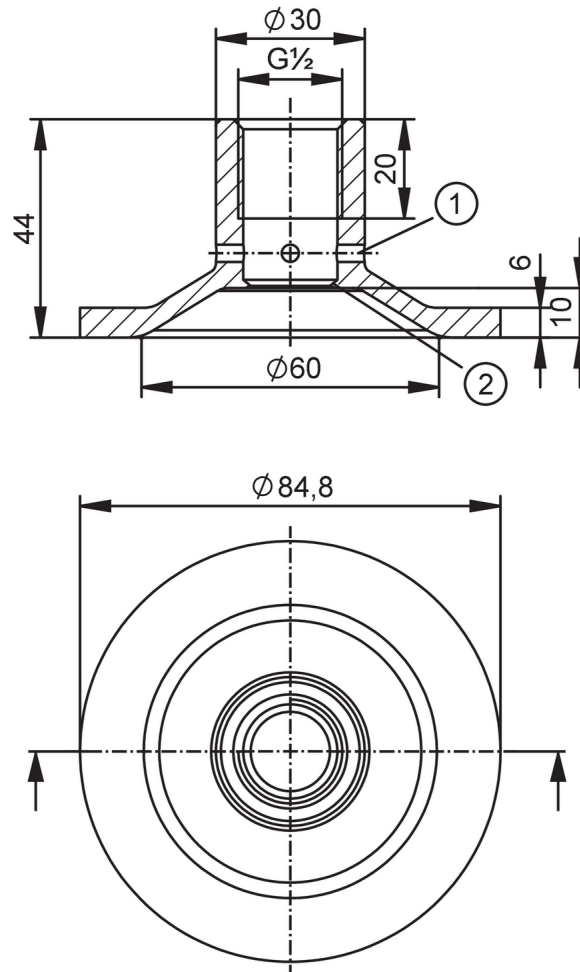

- 1 Leakage port
2 Sealing edge



EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port (3A)	
Installation	recommended for wall thickness ≤ 6 mm and for unfavourable welding conditions	
Pressure rating	50 bar	5 MPa
Note on pressure rating	for the connection sensor - adapter	

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight	[g]	362.5
Materials (wetted parts)	Welding adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm	
Sensor connection	G 1/2 sealing cone	
Process connection	Welding adapter Ø 84,8 mm	

E43919



Welding adapter for process sensors

WELDING ADAPT G1/2 D85X44 V4A/3A

Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz < 4 µm
Remarks	
Pack quantity	1 pcs.