E43920

Welding adapter for process sensors

WELDING ADAPT G1/2 D85X34/11,5 V4A/3A

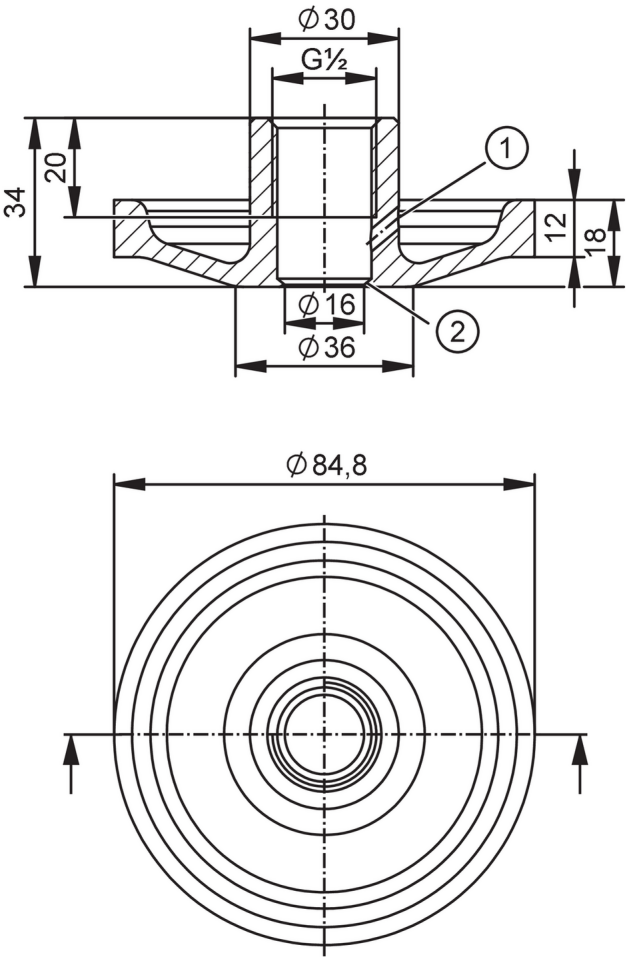

1 Leakage port
2 Sealing edge

3A EC 1935/2004 EHEDG Certified FCM FDA

Application		
Design	with leakage port (3A)	
Installation	recommended for wall thickness <= 6 mm and for unfavourable welding conditions	
Pressure rating	50 bar	5 MPa
Note on pressure rating	for the connection sensor - adapter	
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight [g]	379.29	
Materials (wetted parts)	Welding adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm	
Sensor connection	G 1/2 sealing cone	
Process connection	Welding adapter Ø 84,8 mm	
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz < 4 µm	

E43920

Welding adapter for process sensors

WELDING ADAPT G1/2 D85X34/11,5 V4A/3A

Remarks	
Pack quantity	1 pcs.