


E70350



Patchcords with valve plug

VSTGH050MSS0002B03VDAA041--S

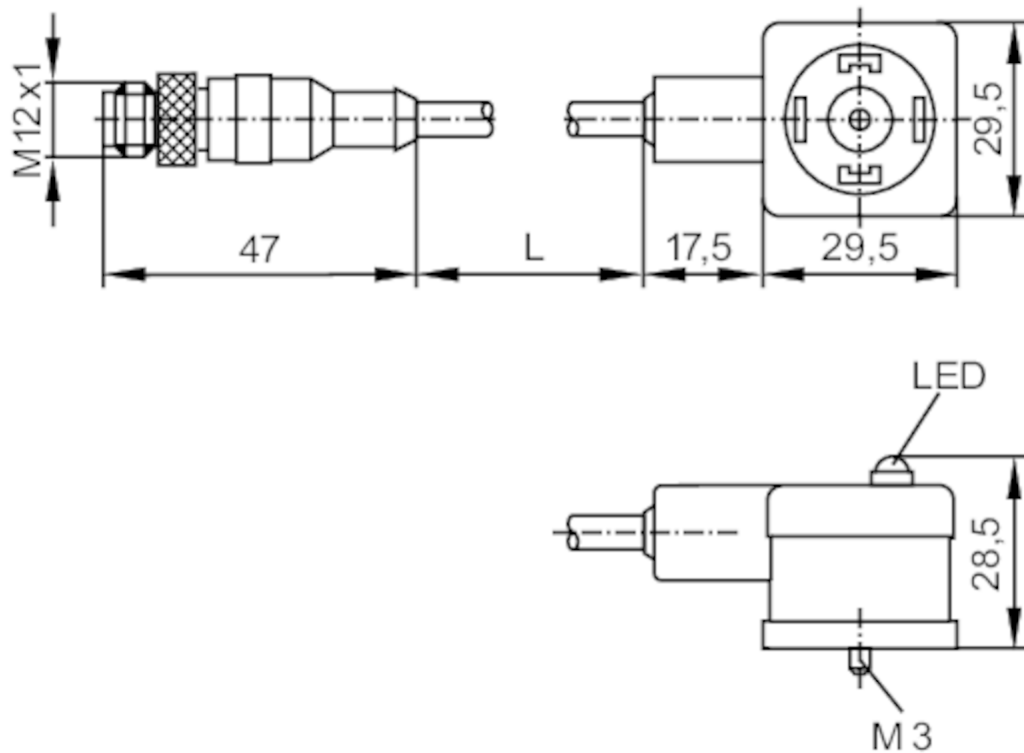

Application

System	Free from silicone; Halogen-free; gold-plated contacts
Free from silicone	yes

Electrical data

Operating voltage [V]	< 24 AC/DC
Overtoltage protection	free-wheeling diode

Operating conditions

Ambient temperature [°C]	-25...90
Protection	IP 67

Mechanical data

Weight [g]	138.8
Material	housing: TPU (urethane)
Molded-body material	TPU (urethane)
Material nut	brass, nickel-plated

Displays / operating elements

Display	Power	1 x LED, green
---------	-------	----------------

Accessories

Items supplied	screw: 1
	panel for labelling: 1

E70350



Patchcords with valve plug


VSTGH050MSS0002B03VDAA041--S

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: TPU (urethane); Locking: brass, nickel-plated; Contacts: gold-plated



Electrical connection

Cable: 2 m, PUR / PVC, Halogen-free; 3 x 0.5 mm² (42 x Ø 0.1 mm)

Connection

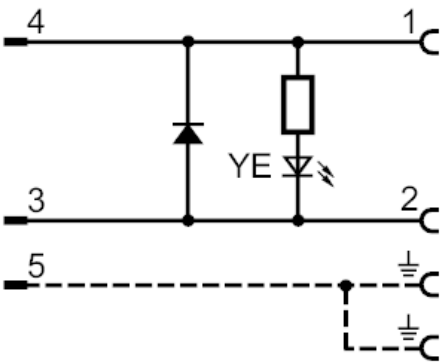

Electrical connection - Socket

Connector: 1 x valve type A DIN (EN 175301-803), angled; Moulded body: TPU (urethane); Locking: brass, nickel-plated; Contacts: nickel-plated brass

