




Wall passage

Wall passage stainless steel

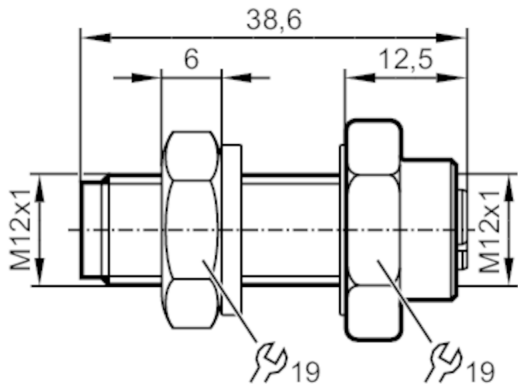

Electrical data

Operating voltage	[V]	< 60 AC/DC
Max. current load total	[A]	8; (Pin 1+3: 4 A; Pin 2+4: 4 A)

Operating conditions

Ambient temperature	[°C]	-40...85
Protection		IP 65; IP 67; IP 69K

Mechanical data


Weight	[g]	29.5
Material		stainless steel (1.4305 / 303); sealing: EPDM
Molded-body material		stainless steel (1.4305 / 303)
Tightening torque	[Nm]	1

Remarks

Pack quantity		1 pcs.
---------------	--	--------


Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Moulded body: stainless steel (1.4305 / 303)



Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Moulded body: stainless steel (1.4305 / 303)



E73009



Wall passage

Wall passage stainless steel

Connection

