


# E75228



## Push-in L-fitting for pneumatic connections

AirBox push-in L-connect 10pcs

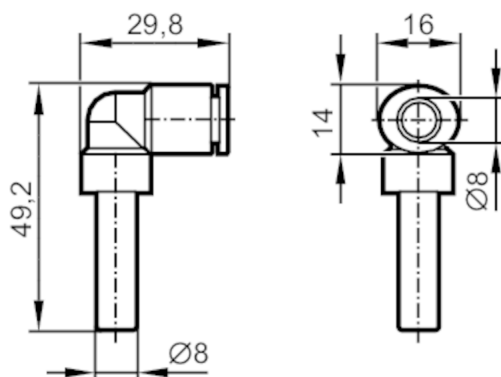

### Application

|       |                                              |
|-------|----------------------------------------------|
| Media | compressed air according to ISO 8573-1: 2001 |
|-------|----------------------------------------------|

### Operating conditions

|                     |       |                  |
|---------------------|-------|------------------|
| Operating pressure  | [bar] | 10; (min. -0,95) |
| Ambient temperature | [°C]  | -20...80         |

### Mechanical data

|                 |                                                                                                                         |      |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|------|
| Weight          | [g]                                                                                                                     | 69.5 |
| Material        | housing: Nickel-plated brass / PA66; release ring: polyoxymethylene; tooth lock washer: stainless steel; form ring: NBR |      |
| Tube fittings   |                                                                                                                         | 8 mm |
| Sleeve diameter | [mm]                                                                                                                    | 8    |

### Remarks

|               |         |
|---------------|---------|
| Pack quantity | 10 pcs. |
|---------------|---------|