


E79995



AS-Interface flat cable insulation displacement connector

FC connector PVC V2A 2m

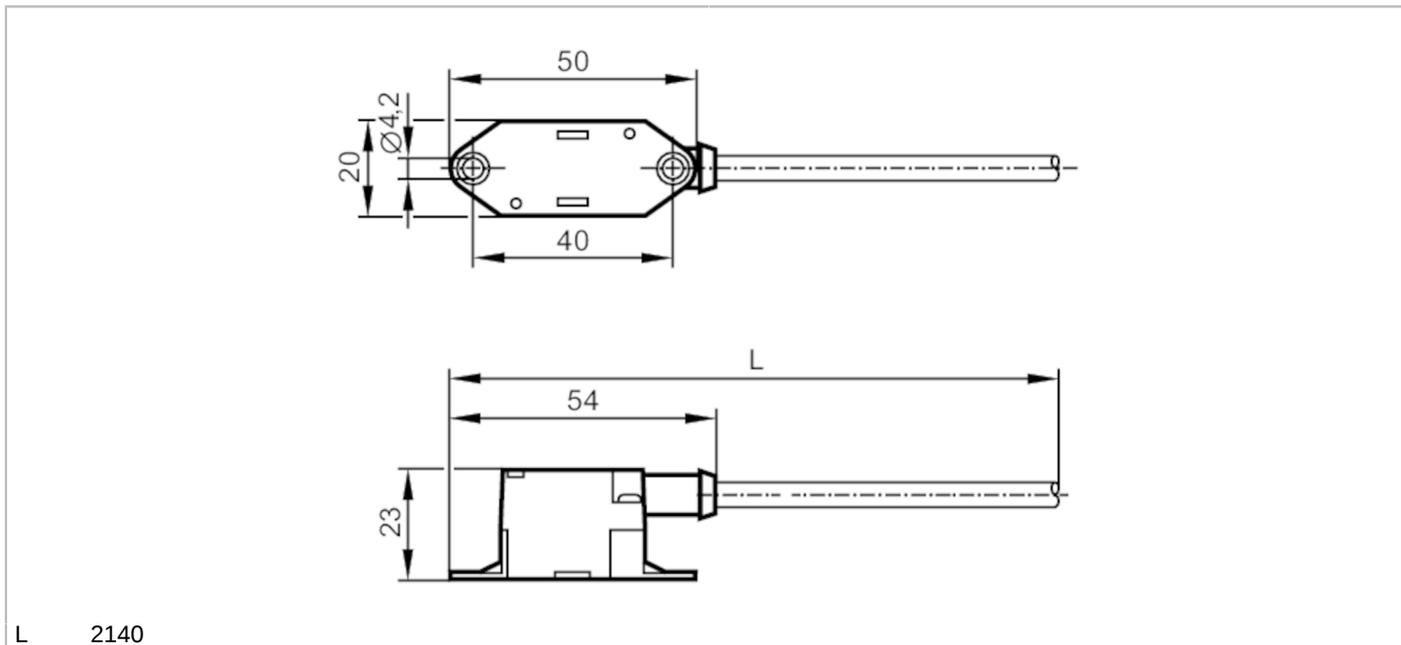

L 2140

Application	
Design	AS-i
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current load total [A]	2
Operating conditions	
Ambient temperature [°C]	-20...70
Protection	IP 67
Mechanical data	
Weight [g]	97.4
Material	housing Upper part: PUR; housing lower part: PA 6.6; screw: stainless steel (1.4305 / 303)
Remarks	
Remarks	The flat cable should not end in the splitter. Use a flat cable seal or heat-shrink cap for sealing.
Pack quantity	1 pcs.

E79995




AS-Interface flat cable insulation displacement connector

FC connector PVC V2A 2m

Electrical connection

Cable: 2 m, PVC, Ø 5.75 mm; 2 x 0.75 mm², PVC

Connection

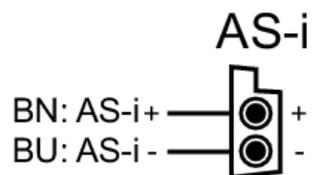

brown	AS-i +
blue	AS-i -