


E80380



RFID tag

ID-TAG/30X2,8/03 - 64 Kbit

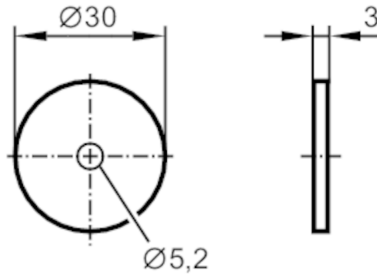

Application		
Operating temperature (active) [°C]		-25...85
Peak temperature (passive) [°C]		90
Electrical data		
Operating frequency [MHz]		13,56
Memory size [bit]		65536
Memory type		FRAM
Chip type		MB89R112
Number of the blocks		256
Block size [Byte]		32
Unique Identification Number (UID) [Byte]		8
RFID standard		ISO 15693
Max. read cycles		unlimited
Max. write cycles		unlimited
Operating conditions		
Ambient temperature [°C]		-25...85
Storage temperature [°C]		-40...90
Protection		IP 68; IP 69K
Tests / approvals		
Radio approval		ISO 15693
Mechanical data		
Weight [g]		3.85
Type of mounting		installation on non-metal materials; (screw fastening ; sticking to a surface)
Dimensions [mm]		Ø 30 / L = 3
Material		PPA [ISO 1874: PA6T/6I-GF50]
Remarks		
Pack quantity		1 pcs.

E80380



RFID tag

ID-TAG/30X2,8/03 - 64 Kbit

Other data

Reading distance when mounted on non-metal (mm)

ANT410 / DTI410	15
ANT411 / DTI411	20
ANT420 / DTI420 / DTM424 / DTI424 / DTM426	10
ANT421 / DTI421 / DTM425 / DTI425 / DTM427	30
ANT430 / DTI430 / DTM434 / DTI434 / DTM436	25
ANT431 / DTI431 / DTM435 / DTI435 / DTM437	40
ANT513 / DTI513 / DTC510	65
ANT515 / DTI515 / ANT516 / DTI516	30
ANT600 / DTI600	115