




Wiring block

ZDO4H055MSS0000-00STAK120MSS

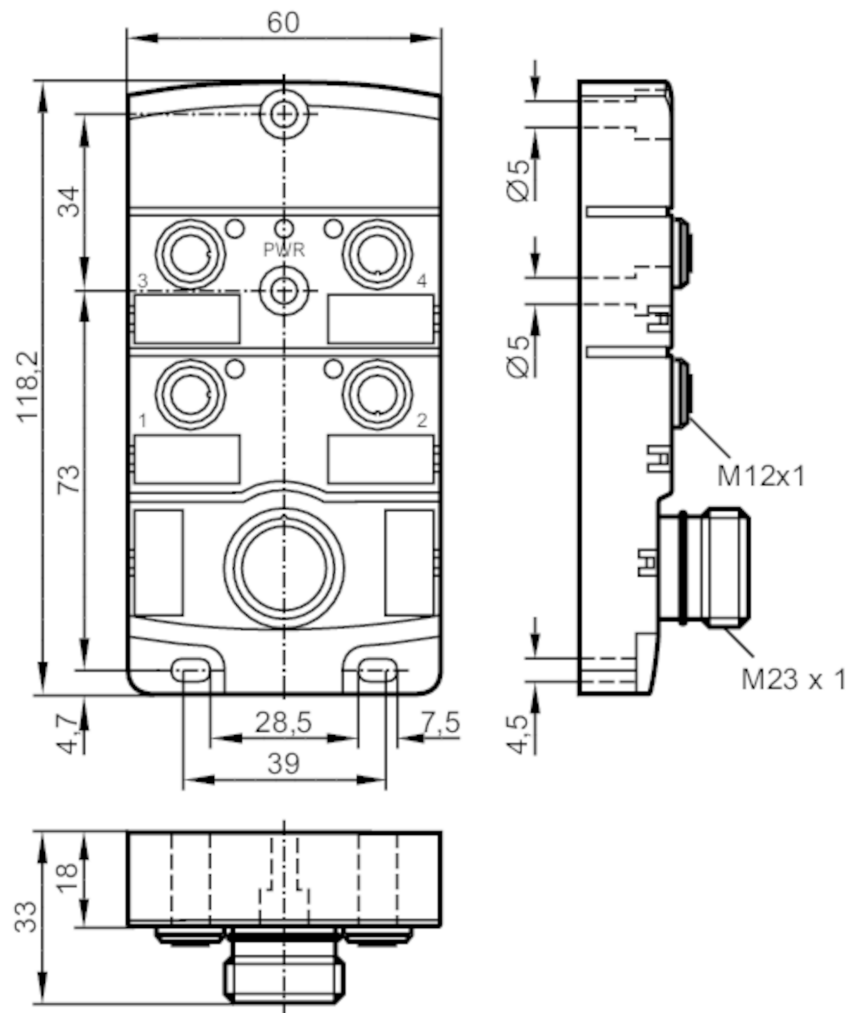

Application

System	Free from silicone; gold-plated contacts
Free from silicone	yes

Electrical data

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10


Outputs

Electrical design	PNP
-------------------	-----



Wiring block

ZDO4H055MSS0000-00STAK120MSS


Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight	[g]	224.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	118.2 x 60 x 33
Material		housing: PA
Number of ports splitter box		4
Connector type		M12
Displays / operating elements		
Display	Switching status	4 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied	Protective caps: 2	
	labels: 4	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Connection		
Connector: 1 x M23; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		
		



Wiring block

ZDO4H055MSS0000-00STAK120MSS

Connection

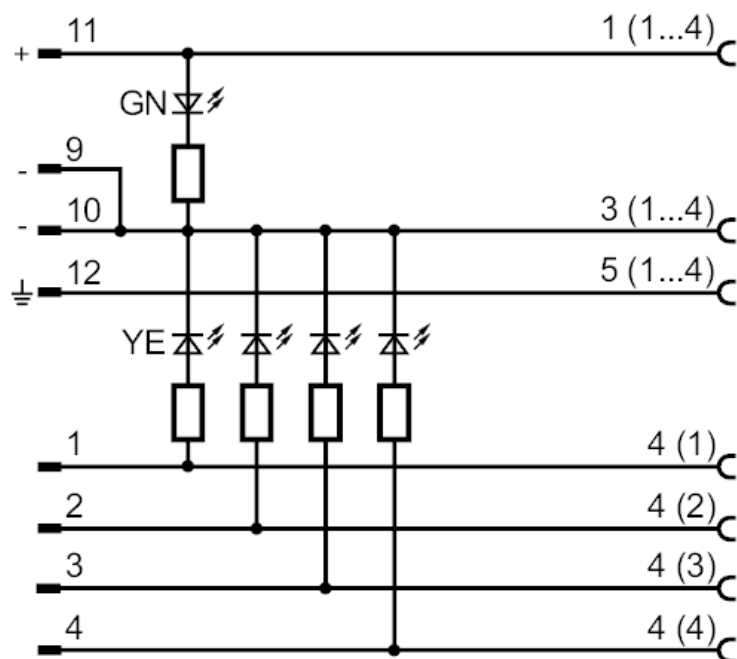

Electrical connection - slot

Connector: 4 x M12; coding: A; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

