


ZDO4H050MSS0000-00STAK190MSS

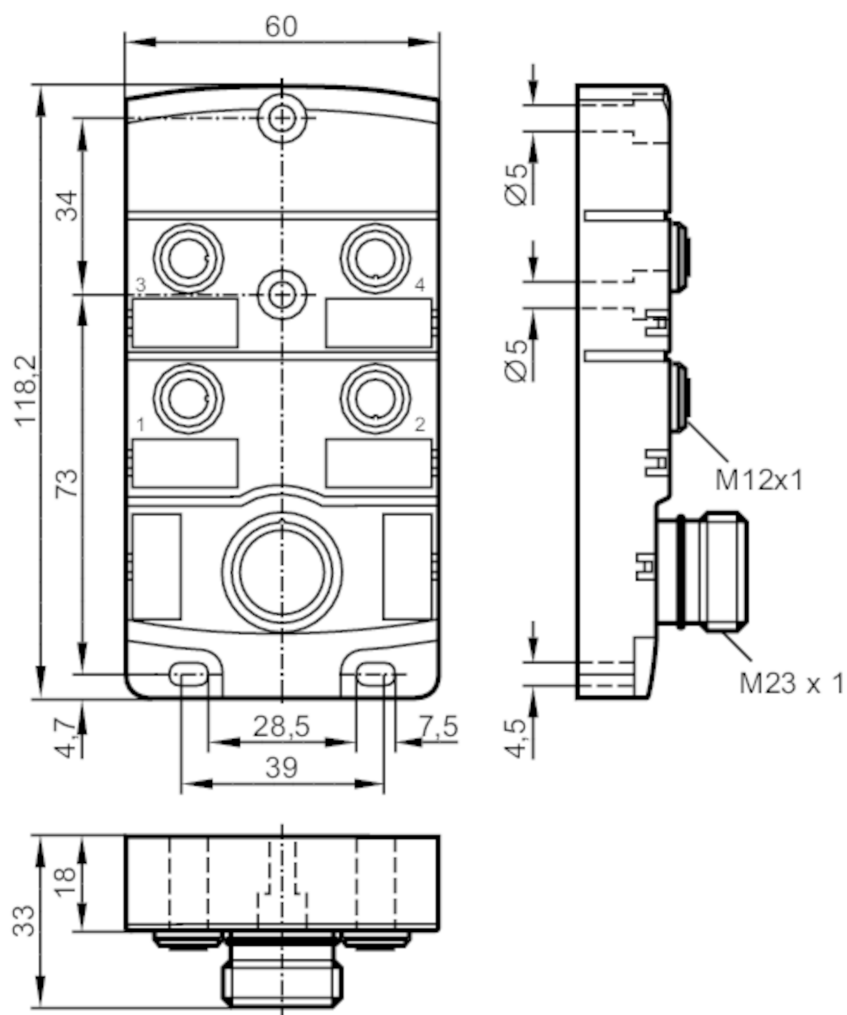

yes

< 30 DC; (cULus - Class 2 source required)

4

10

-25...80



Wiring block

ZDO4H050MSS0000-00STAK190MSS

Protection	IP 67
------------	-------

Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

Mechanical data

Weight	[g]	226.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	118.2 x 60 x 33
Material		housing: PA
Number of ports splitter box		4
Connector type		M12

Accessories


Items supplied	Protective caps: 2
	labels: 4

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

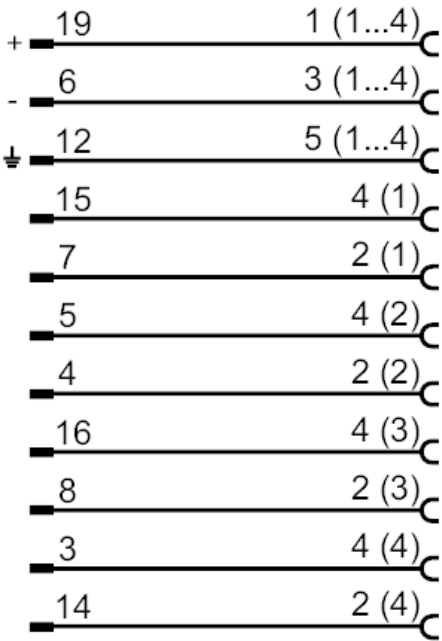

EBC003



Wiring block

ZDO4H050MSS0000-00STAK190MSS

Electrical connection - slot

Connector: 4 x M12; coding: A; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

