




Wiring block

ZDO4H059MSS0000-00STAK190MSS

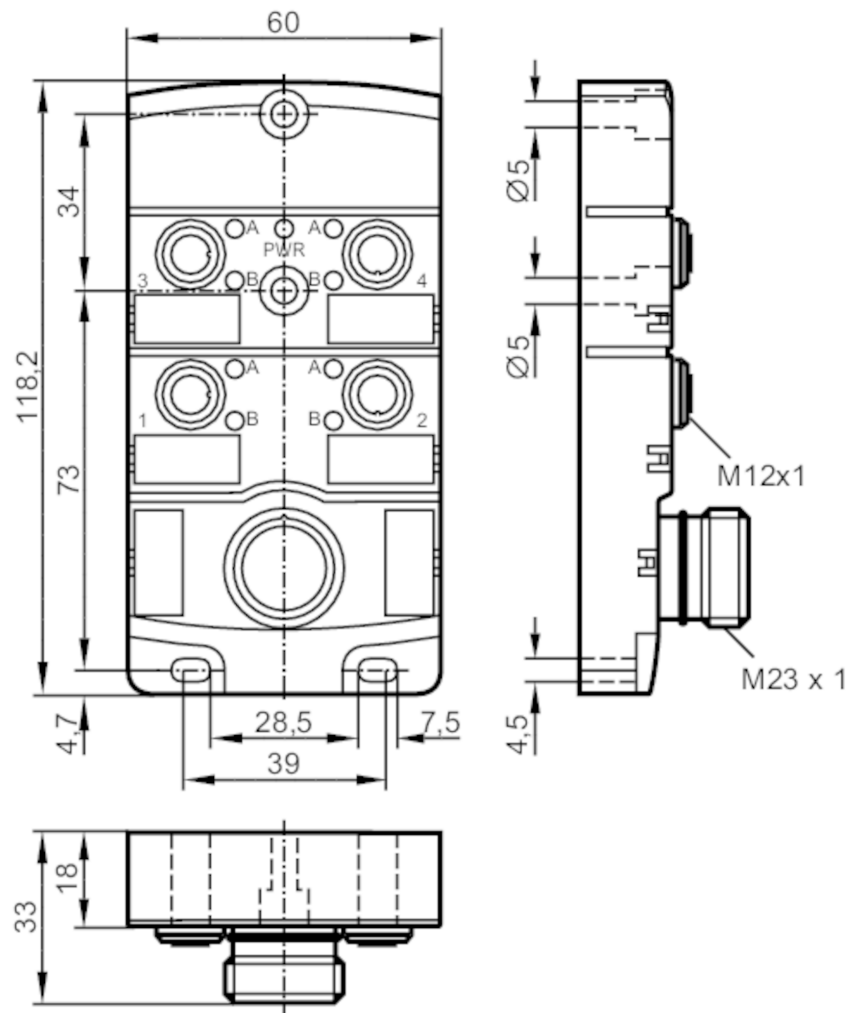

Application

|                    |                                          |
|--------------------|------------------------------------------|
| System             | Free from silicone; gold-plated contacts |
| Free from silicone | yes                                      |

Electrical data

|                                   |     |                                               |
|-----------------------------------|-----|-----------------------------------------------|
| Operating voltage                 | [V] | 10...30 DC; (cULus - Class 2 source required) |
| Max. current load per module/slot | [A] | 4                                             |
| Max. current load total           | [A] | 10                                            |


Outputs

|                   |     |
|-------------------|-----|
| Electrical design | PNP |
|-------------------|-----|



Wiring block


ZDO4H059MSS0000-00STAK190MSS

| Operating conditions                                                                |                    |                    |
|-------------------------------------------------------------------------------------|--------------------|--------------------|
| Ambient temperature                                                                 | [°C]               | -25...80           |
| Protection                                                                          |                    | IP 67              |
| Tests / approvals                                                                   |                    |                    |
| UL approval                                                                         | Enclosure type     | Type 1             |
| Mechanical data                                                                     |                    |                    |
| Weight                                                                              | [g]                | 226                |
| Housing                                                                             |                    | rectangular        |
| Type of mounting                                                                    |                    | Backplane mounting |
| Dimensions                                                                          | [mm]               | 118.2 x 60 x 33    |
| Material                                                                            |                    | housing: PA        |
| Number of ports splitter box                                                        |                    | 4                  |
| Connector type                                                                      |                    | M12                |
| Displays / operating elements                                                       |                    |                    |
| Display                                                                             | Switching status   | 8 x LED, yellow    |
|                                                                                     | Power              | 1 x LED, green     |
| Accessories                                                                         |                    |                    |
| Items supplied                                                                      | Protective caps: 2 |                    |
|                                                                                     | labels: 4          |                    |
| Remarks                                                                             |                    |                    |
| Pack quantity                                                                       | 1 pcs.             |                    |
| Electrical connection - Connection                                                  |                    |                    |
| Connector: 1 x M23; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm          |                    |                    |
|  |                    |                    |

## Wiring block

ZDO4H059MSS0000-00STAK190MSS

## Connection

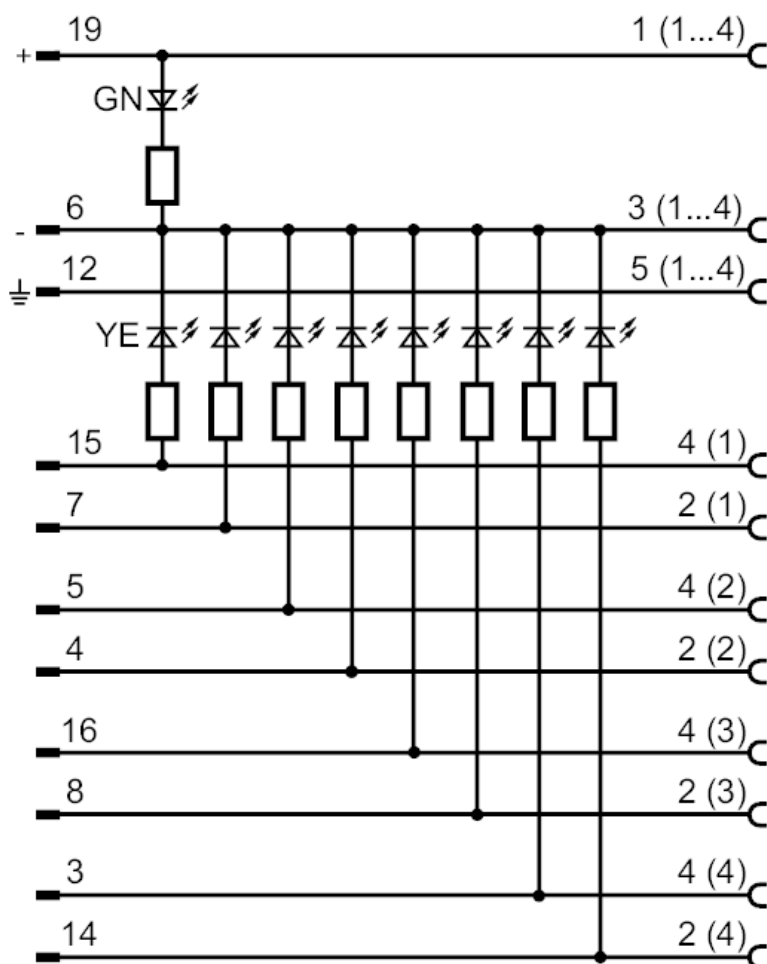

## Electrical connection - slot

Connector: 4 x M12; coding: A; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

