




Wiring block

ZDO6H050MSS0000-00STAK190MSS

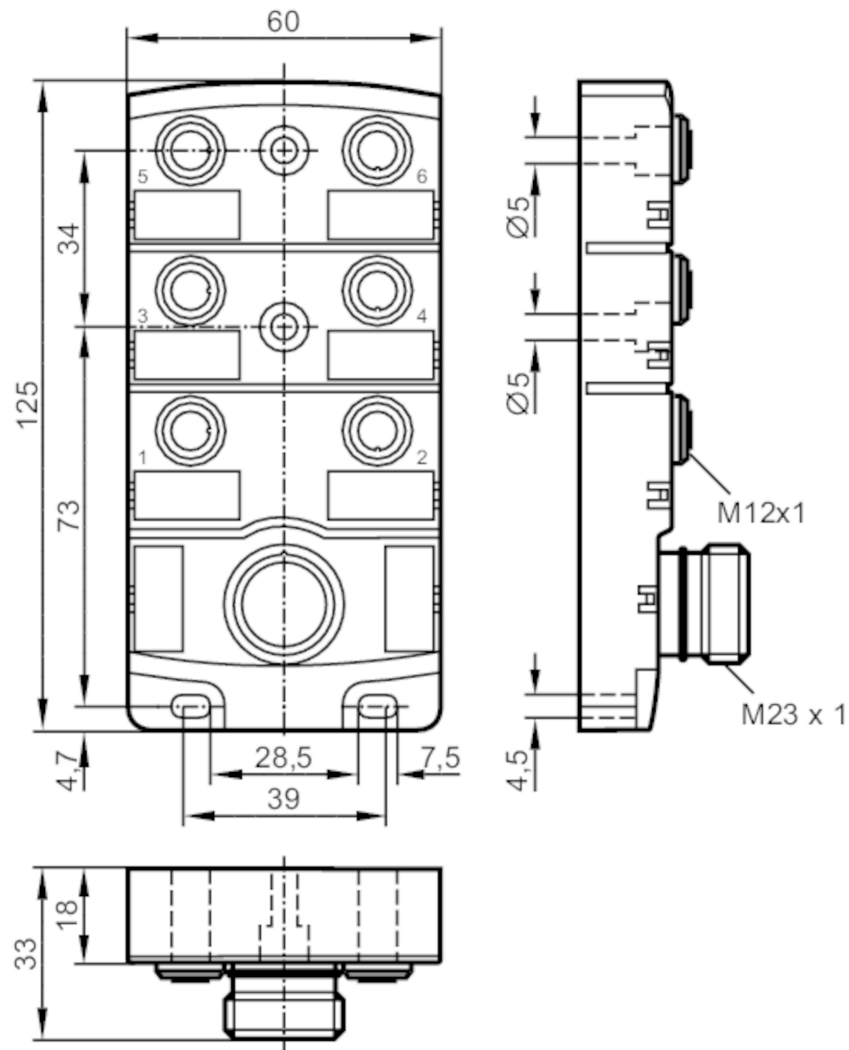

Application		
System		Free from silicone; gold-plated contacts
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...80




Wiring block

ZDO6H050MSS0000-00STAK190MSS

Protection		IP 67	
Tests / approvals			
UL approval		Enclosure type	Type 1
Mechanical data			
Weight	[g]	252.5	
Housing		rectangular	
Type of mounting		Backplane mounting	
Dimensions	[mm]	125 x 60 x 33	
Material		housing: PA	
Number of ports splitter box		6	
Connector type		M12	
Accessories			
Items supplied		Protective caps: 2	
		labels: 6	
Remarks			
Pack quantity		1 pcs.	

Electrical connection - Connection

Connector: 1 x M23; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

+	19	1 (1...6)	C
-	6	3 (1...6)	C
±	12	5 (1...6)	C
	15	4 (1)	C
	7	2 (1)	C
	5	4 (2)	C
	4	2 (2)	C
	16	4 (3)	C
	8	2 (3)	C
	3	4 (4)	C
	14	2 (4)	C
	17	4 (5)	C
	9	2 (5)	C
	2	4 (6)	C
	13	2 (6)	C

EBC007



Wiring block

ZDO6H050MSS0000-00STAK190MSS

Electrical connection - slot

Connector: 6 x M12; coding: A; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

