




Mounting set for ecomatRelay

ecomatRelay/MountingSet/9P

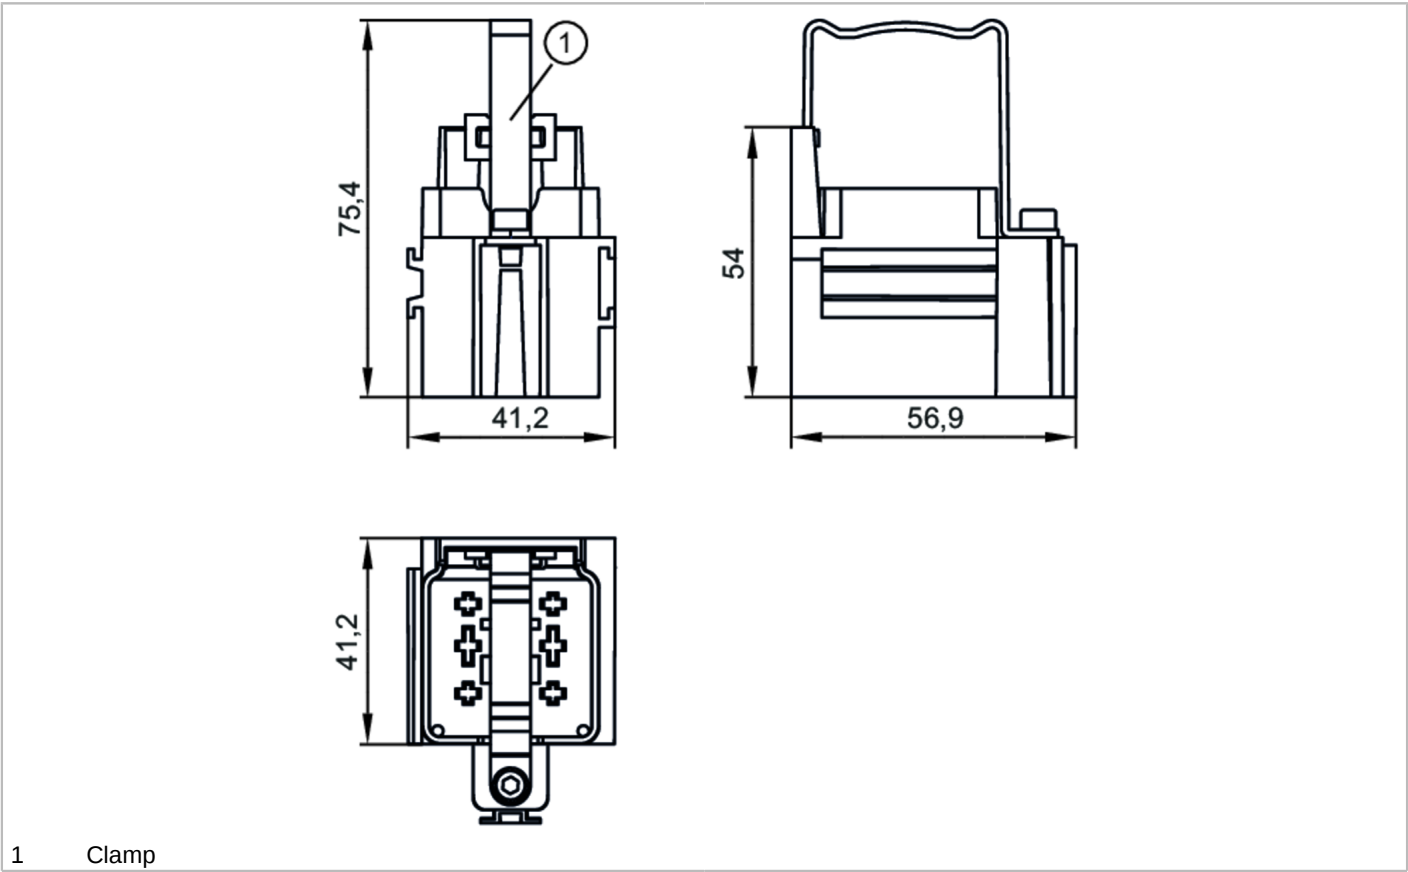

CE UK
CA

Application		
Design	for ecomatRelay CR3025	
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection	IP 67; (mating connector plugged in)	
Mechanical data		
Weight	[g]	78.9
Type of mounting	vertical; (contacts oriented downwards)	
Dimensions	[mm]	56.9 x 41.2 x 75.4
Material	pole socket: PA 6.6-GF30	
Information on service life	max. mating cycles of the crimp contacts:	10
Accessories		
Items supplied	pole socket: 1, 9 poles	
	Clamp: 1	
	sealing: 1	
	cylinder head bolt: 1 x (M4 x 30 mm)	
	Nuts: 1 x M4, self-locking	
	Crimp contacts: 5 x 4,8 mm	
	sealing of the individual cores: 5 x 4,8 mm	
	Crimp contacts: 4 x 2,8 mm	
	sealing of the individual cores: 4 x 2,8 mm	

EC3025



Mounting set for ecomatRelay


ecomatRelay/MountingSet/9P


Remarks

Pack quantity	1 pcs.
---------------	--------

Diagrams and graphs

Installation

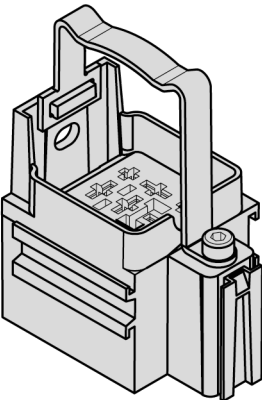

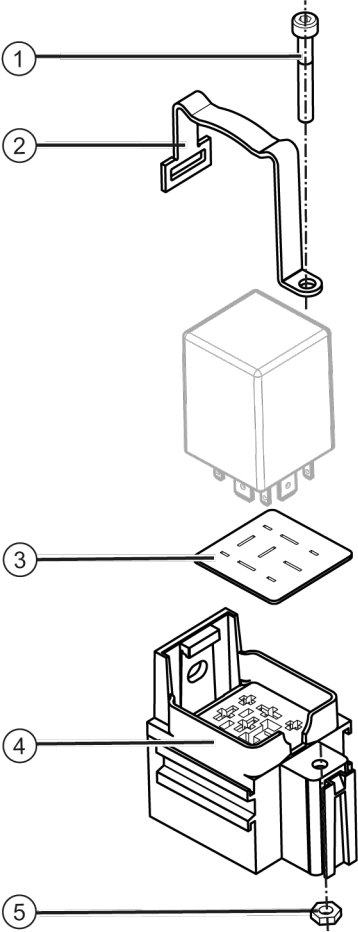

- 1: cylinder head bolt M4x30
- 2: Clamp
- 3: sealing
- 4: pole socket
- 5: Nut M4