


EVC503



Y connection cable

YDOAHXX0MSS0,25HXXSTGH050MSS

Please see the technical note under "Downloads"

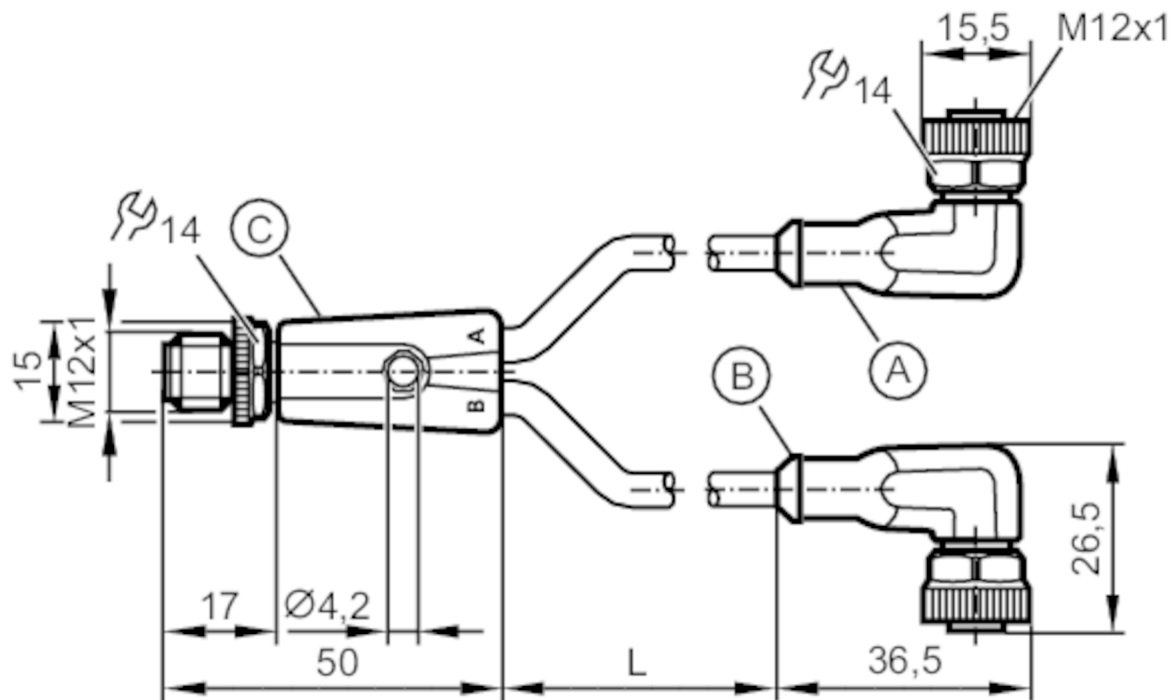

Application		
System	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	10...30 DC
Protection class		II
Max. current load total	[A]	3
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 65; IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	64.7
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Sealing material		FKM
Number of ports splitter box		2
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	Bending cycles	> 2 Mio.
	Torsional strain	± 180 °/m

EVC503



Y connection cable


YDOAHXX0MSS0,25HXXSTGH050MSS

Remarks


Notes	Please see the technical note under "Downloads"
Pack quantity	1 pcs.

Electrical connection - plug C

Connection

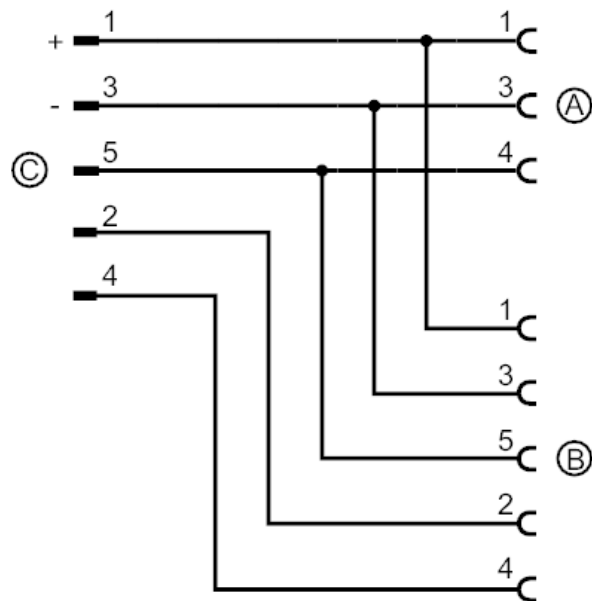


Connector: 1 x M12, straight; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Electrical connection - Socket A

Cable: 0.25 m, PUR, Halogen-free, grey, Ø 4.5 mm; 3 x 0.25 mm² (32 x Ø 0.1mm)

Connector: 1 x M12, angled; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated; sealing: FKM; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



EVC503



Y connection cable

YDOAHXX0MSS0,25HXXSTGH050MSS

Electrical connection - Socket B

Cable: 0.25 m, PUR, Halogen-free, black, Ø 4.6 mm; 5 x 0.34 mm² (42 x Ø 0.1 mm)

Connector: 1 x M12, angled; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated; sealing: FKM;

Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

