




Y connection cable

YSDGH050MSS0002H05STGH040MSS

Please see the technical note under "Downloads"

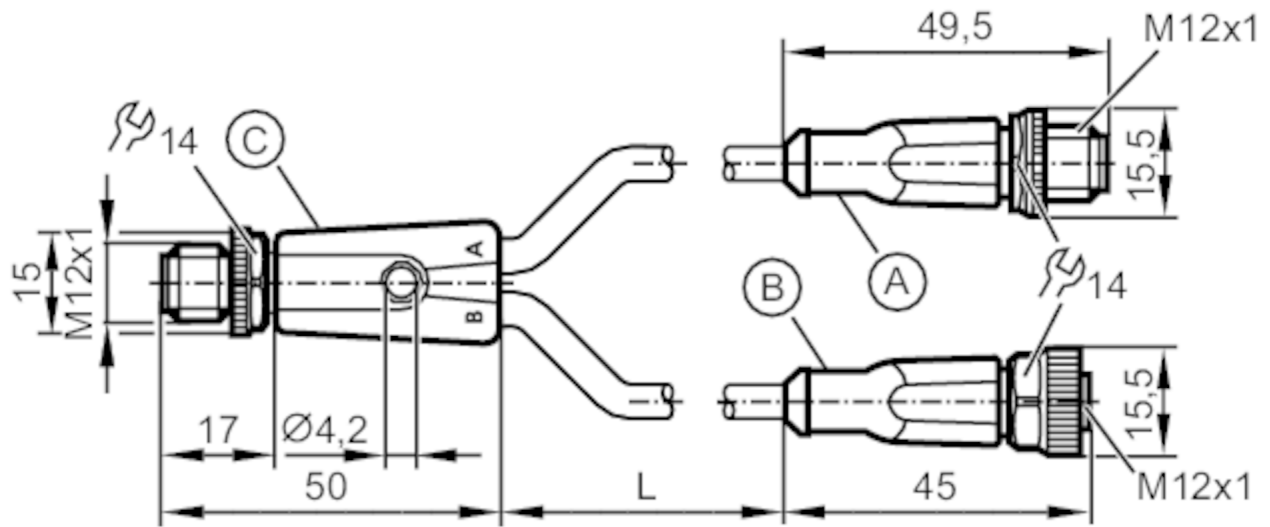

Application

System	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability
Free from silicone	yes

Electrical data

Operating voltage	[V]	24 DC
Protection class		III
Max. current load total	[A]	3

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight	[g]	183.1
Molded-body material		TPU (urethane) / TPU (urethane)
Material nut		brass, nickel-plated
Sealing material		Viton
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	Bending cycles	> 5 Mio.
	Torsional strain	± 180 °/m

EVC843




Y connection cable

YSDGH050MSS0002H05STGH040MSS


Remarks	
Notes	Please see the technical note under "Downloads"
Pack quantity	1 pcs.

Electrical connection - plug C

Connector: M12, straight; coding: A; Moulded body: TPU (urethane), black; Locking: knurled nut, brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!




Connection

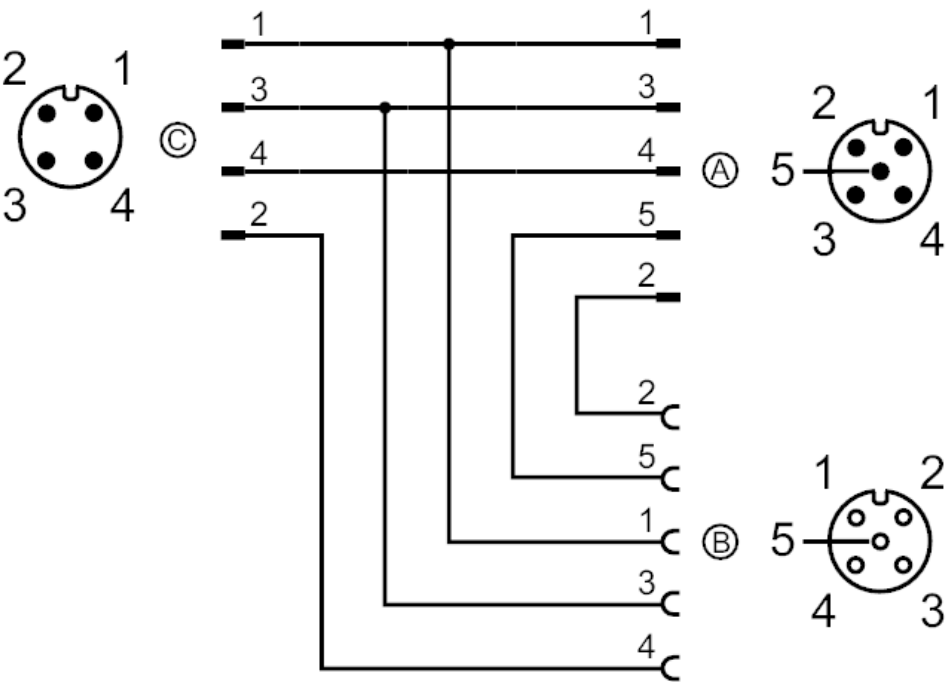

Electrical connection - plug A

Cable: 2 m, PUR, Halogen-free, black, Ø 4.6 mm; 5 x 0.34 mm² (42 x Ø 0.1 mm)

Connector: M12, straight; coding: A; Moulded body: TPU (urethane), black; Locking: knurled nut, brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!



EVC843




Y connection cable

YSDGH050MSS0002H05STGH040MSS


Electrical connection - Socket B

Cable: 2 m, PUR, Halogen-free, black, Ø 4.6 mm; 5 x 0.34 mm² (42 x Ø 0.1 mm)

Connector: M12, straight; coding: A; Moulded body: TPU (urethane), black; Locking: knurled nut, brass, nickel-plated; sealing: Viton; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!



Diagrams and graphs

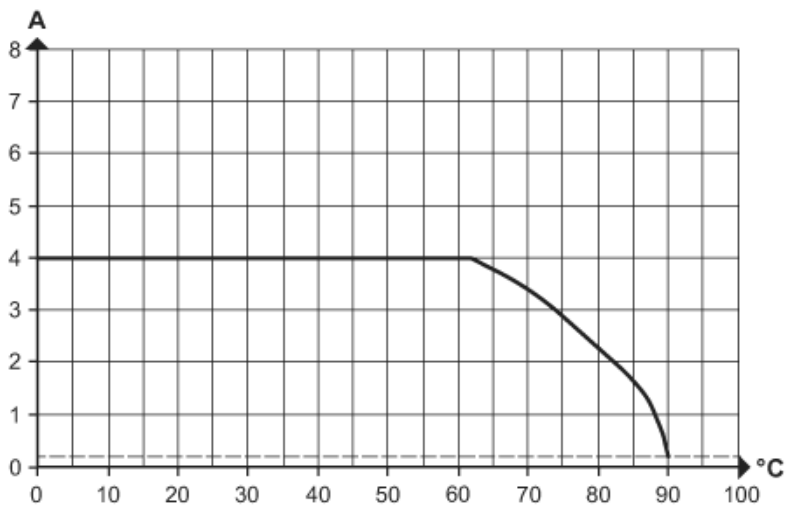

Derating I_{max} * 0.8 DIN EN 60512-5-2

- X Ambient temperature [°C]
- Y Current [A]