

# EVT348



## Y connection cable

YDOGH040VAS01,6E04STGH050VAS



| Application                                                     |      |                                                                  |
|-----------------------------------------------------------------|------|------------------------------------------------------------------|
| System                                                          |      | Free from silicone; gold-plated contacts; Drag chain suitability |
| Application                                                     |      | sanitary and wet areas in the food industry                      |
| Free from silicone                                              |      | yes                                                              |
| Electrical data                                                 |      |                                                                  |
| Operating voltage                                               | [V]  | < 60 AC/DC                                                       |
| Protection class                                                |      | II                                                               |
| Max. current load total                                         | [A]  | 4                                                                |
| Overall current rating (UL)                                     | [A]  | 3                                                                |
| Operating conditions                                            |      |                                                                  |
| Ambient temperature                                             | [°C] | -25...100                                                        |
| Note on ambient temperature                                     |      | cULus: ...50                                                     |
| Ambient temperature (moving)                                    | [°C] | 5...100                                                          |
| Note on ambient temperature (moving)                            |      | cULus: ...50                                                     |
| Storage temperature                                             | [°C] | -25...55                                                         |
| Storage humidity                                                | [%]  | 10...100                                                         |
| Other climatic conditions for storage according to stated class |      | 1K22/ DIN 60721-3-1                                              |
| Protection                                                      |      | IP 65; IP 67; IP 68; IP 69K                                      |
| Mechanical data                                                 |      |                                                                  |
| Weight                                                          | [g]  | 163                                                              |
| Molded-body material                                            |      | PVC                                                              |



Y connection cable

YDOGH040VAS01,6E04STGH050VAS


|                              |                                          |                                                                                    |
|------------------------------|------------------------------------------|------------------------------------------------------------------------------------|
| Material nut                 | stainless steel (1.4404 / 316L)          |                                                                                    |
| Sealing material             | EPDM                                     |                                                                                    |
| Number of ports splitter box | 2                                        |                                                                                    |
| Drag chain suitability       | yes                                      |                                                                                    |
| Drag chain suitability       | Bending radius for flexible applications | min. 10 x cable diameter                                                           |
|                              | Travel speed                             | max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s² |
|                              | Bending cycles                           | > 1 Mio.                                                                           |
|                              | Torsional strain                         | ± 180 °/m                                                                          |

Remarks


|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

Electrical connection - plug C

Connector: 1 x M12, straight; coding: A; Moulded body: PVC, orange; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

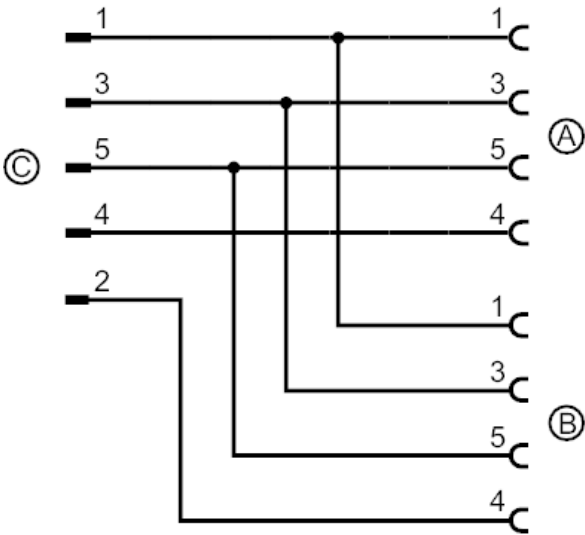

# EVT348



## Y connection cable

YDOGH040VAS01,6E04STGH050VAS

### Electrical connection - Socket A/B

Cable: 1.6 m, PVC, orange, Ø 4.9 mm; 4 x 0.34 mm<sup>2</sup>

Connector: 2 x M12, straight; coding: A; Moulded body: PVC, orange; Locking: stainless steel (1.4404 / 316L); sealing: EPDM;

Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

