




All male cordsets

ASTGH040SCS0002T04

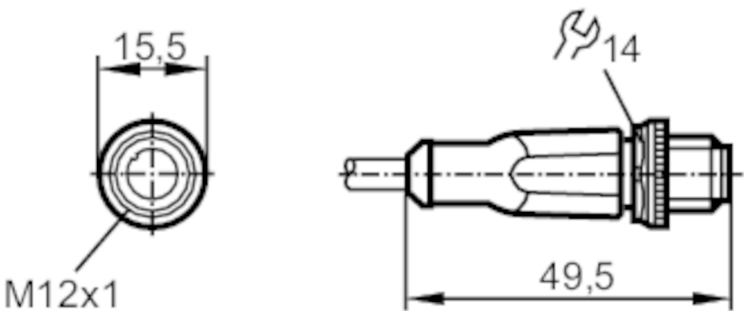

Application		
System		Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability
Application		welding applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 250 AC / < 300 DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Note on ambient temperature		cULus: ...75 °C
Ambient temperature (moving)	[°C]	-25...90
Note on ambient temperature (moving)		cULus: ...75 °C
Storage temperature	[°C]	-25...55
Storage humidity	[%]	10...100
Other climatic conditions for storage according to stated class		1K22/ DIN 60721-3-1
Protection		IP 65; IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	82.8
Dimensions	[mm]	15.5 x 15.5 x 49.5
Molded-body material		TPU (urethane)

EVW018



All male cordsets

ASTGH040SCS0002T04

Material nut	brass, weld coated	
Sealing material	FKM	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	Bending cycles	> 2 Mio.
	Torsional strain	± 180 °/m

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR, Halogen-free, grey, Ø 4.9 mm; not irradiated (can be recycled); resistant to welding sparks; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, weld coated; sealing: FKM; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

1	BN
2	WH
3	BU
4	BK

	Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white




All male cordsets

ASTGH040SCS0002T04

Diagrams and graphs

Characteristic curve for derating

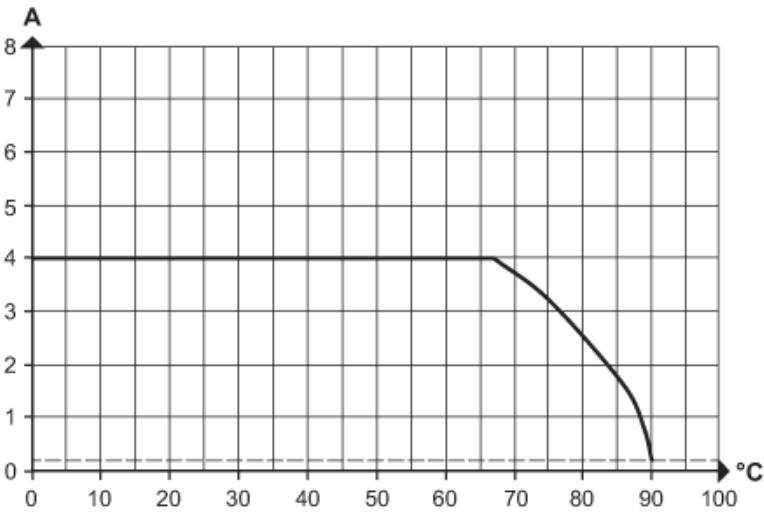

Derating $I_{max} \cdot 0.8$ (DIN EN 60512-5-2)

- X Ambient temperature [°C]
- Y Current [A]