


EY5020



Muting arm set

2X-THROUGH-MULTIBEAM-SENSORS

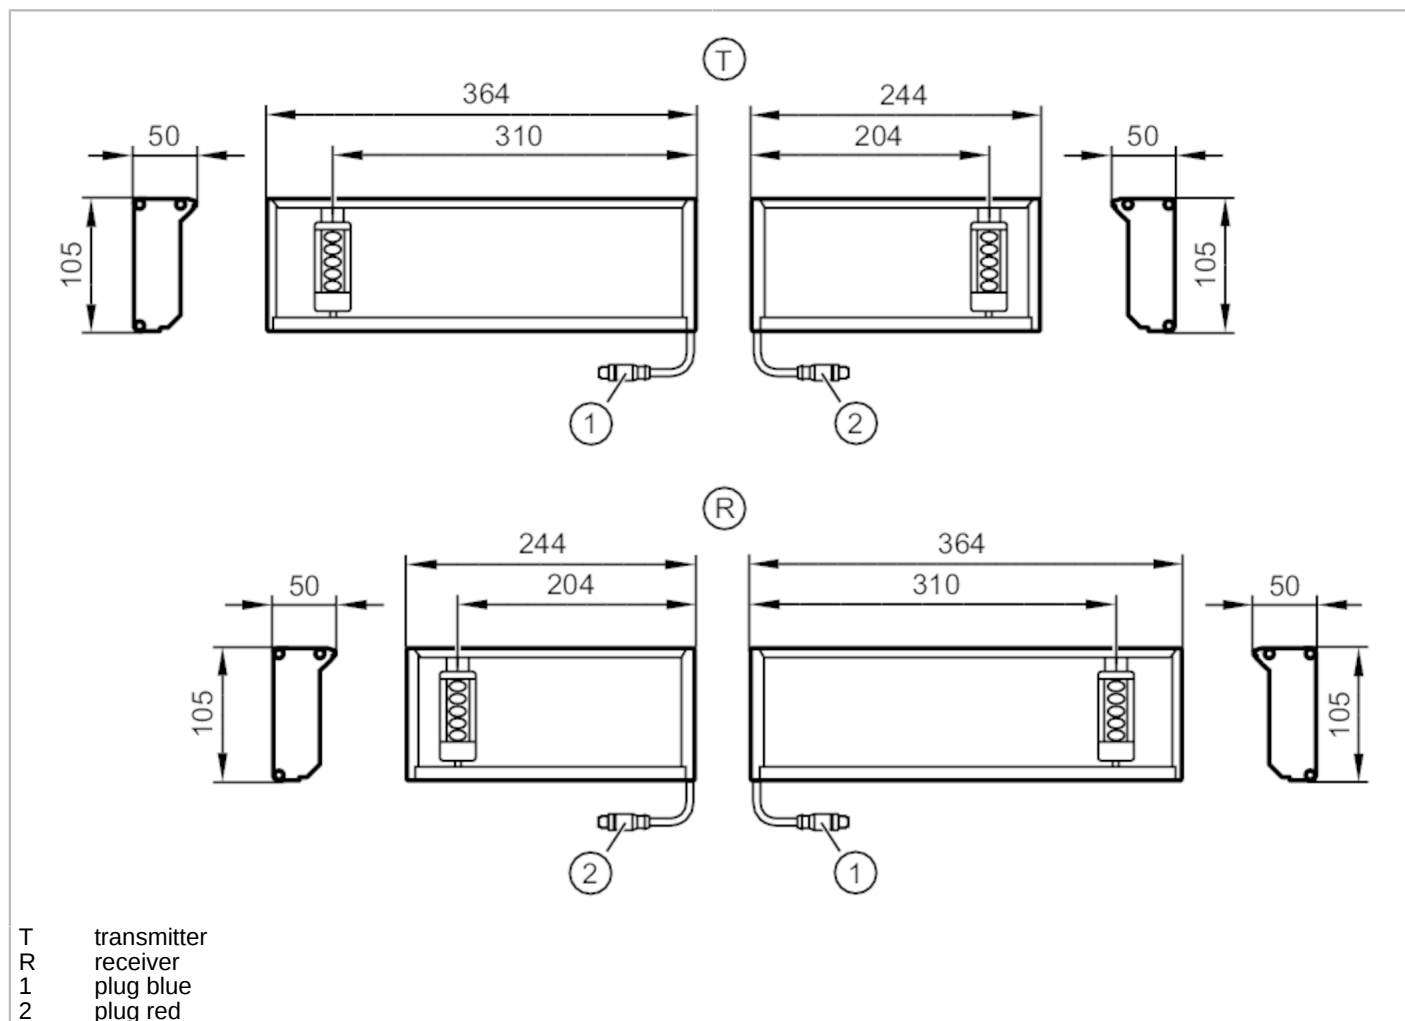

Product characteristics		
Type of light	Infrared light	
Application		
Design	crossbeam muting with two crossbeam multi-beam light barriers	
Function principle	Through-beam sensor	
Electrical data		
Operating voltage	[V]	19.2...28.8 DC
Current consumption	[mA]	30
Protection class	III	
Reverse polarity protection	yes	
Type of light	Infrared light	
Wave length	[nm]	940
Outputs		
Electrical design	PNP	
Output function	dark-on mode	
Max. voltage drop switching output DC	[V]	0.5



Muting arm set

2X-THROUGH-MULTIBEAM-SENSORS

Permanent current rating of switching output DC [mA]	100
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Range [m]	< 3.5
-----------	-------

Operating conditions

Ambient temperature [°C]	-30...55
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2
-----	--------------

Mechanical data

Weight [g]	3540
Material	aluminum; polypropylene
Lens material	polycarbonate-ABS

Displays / operating elements


Display	transmitter	LED, yellow
	receiver	LED, green/red

Remarks


Pack quantity	4 pcs.
---------------	--------

Electrical connection - receiver 1

Connector: 1 x M12; coding: A; Moulded body: blue



Connection

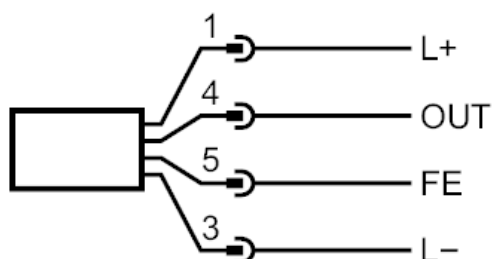

4 OUT Switching output




Muting arm set


2X-THROUGH-MULTIBEAM-SENSORS

Electrical connection - receiver 2

Connector: 1 x M12; coding: A; Moulded body: red




Connection

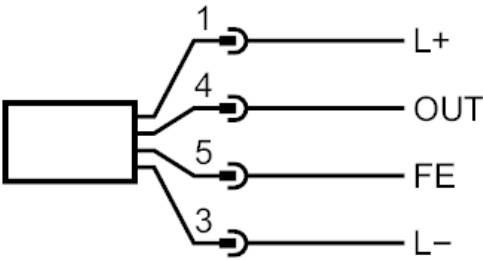

4 OUT Switching output

Electrical connection - transmitter 1

Connector: 1 x M12; coding: A; Moulded body: blue






Muting arm set

2X-THROUGH-MULTIBEAM-SENSORS


Connection

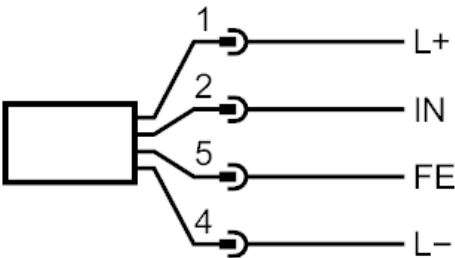


2 IN Sync A

Electrical connection - transmitter 2

Connector: 1 x M12; coding: A; Moulded body: red



Connection

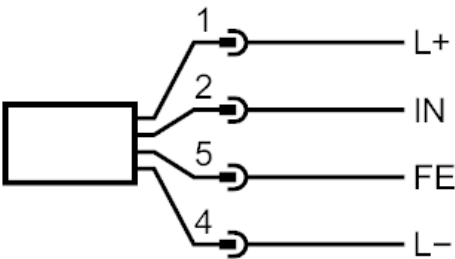

2 IN Sync B