


GM701S



Fail-safe inductive sensor

GIMC-4030-US/2OSSD

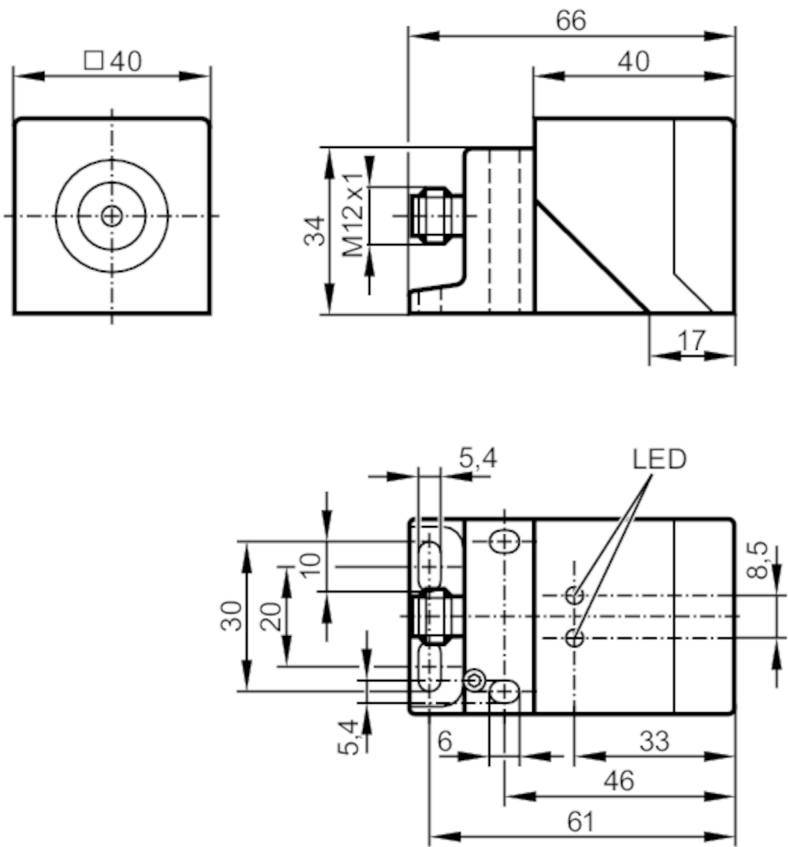

Product characteristics		
Electrical design		PNP
Output function		2 x OSSD (A1 and A2)
Enable zone	[mm]	10...15
Housing		rectangular
Dimensions	[mm]	40 x 40 x 66
Application		
System		gold-plated contacts
Type of operation		continuous operation (maintenance-free)
Safety-related sub-function		safe state when properly undamped
Application		Industrial applications
Electrical data		
Operating voltage	[V]	19.2...30 DC
Rated insulation voltage	[V]	30
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	5000



Fail-safe inductive sensor

GIMC-4030-US/2OSSD

Outputs		
Electrical design		PNP
Output function		2 x OSSD (A1 and A2)
Max. voltage drop switching output DC [V]		2.5; (100 mA)
Output data		Interface type C class 0
Output voltage at 24 V		compatible with EN 61131-2 inputs type 1, 2, 3
Short-circuit protection		yes
Max. capacitive load CL_max [nF]		20
Monitoring range		
Enable zone [mm]		10...15
Safe switching-off distance s(ar) [mm]		30
Reaction times		
Response time to safety request [ms]		50
Response time when approaching the enable zone [ms]		200
Risk time (response time for safety-related faults) [ms]		100
Operating conditions		
Applications		Class C to EN 60654-1 weatherproof application
Ambient temperature [°C]		-25...70
Note on ambient temperature		operational life ≤ 87600 h
Ambient temperature [°C]		10...40
Note on ambient temperature		operational life ≤ 175200 h
Rate of temperature change [K/min]		0.5
Max. relative air humidity [%]		briefly: 5...95 %; permanent: 5...70 %
Air pressure [kPa]		80...106
Max. height above sea level [m]		2000
Ionizing radiation		not permissible
Salt spray		no
Protection		IP 65; IP 67
Tests / approvals		
EMC	IEC 60947-5-2	
	IEC 60947-5-3	
	EN 60947-5-3	
	EN 61000-4-2 ESD	6 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	20 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 61000-4-8	30 A/m
	EN 55011	class B
	Shock resistance	IEC 60947-5-2
Vibration resistance	IEC 60947-5-2	

GM701S



Fail-safe inductive sensor

GIMC-4030-US/2OSSD

Safety classification		
Complies with the requirements	ISO 13849-1: 2015 Category 3, PL e	
	IEC 61508 SIL 3	
	IEC 62061 SIL 3	
Mission time TM	[h]	≤ 175200
Mission time TM (additional indication)		20 years
PFH	[1/h]	1E-08
Mechanical data		
Weight	[g]	342.5
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	40 x 40 x 66
Material		PPE; diecast zinc
Displays / operating elements		
Display	Power	1 x LED, green
	signal	1 x LED, yellow
Remarks		
Remarks	Unless stated otherwise, all data refer to the reference target plate to IEC 60947-5-2 over the whole temperature range.	
	(FE360 = ST37K) 45x45x1 mm	
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M12; coding: A; Contacts: gold-plated		


GM701S



Fail-safe inductive sensor

GIMC-4030-US/2OSSD

Connection

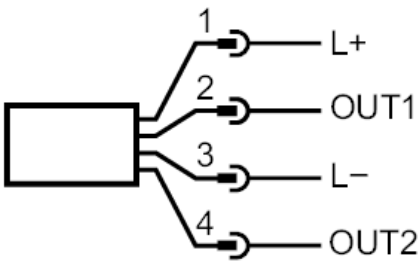

1	L+	
2	OUT1	OSSD1
3	L-	
4	OUT2	OSSD2

OUT: Output