


I7R203



Inductive ring sensor

I7R3010-FPKG/DY/US-100-IPF

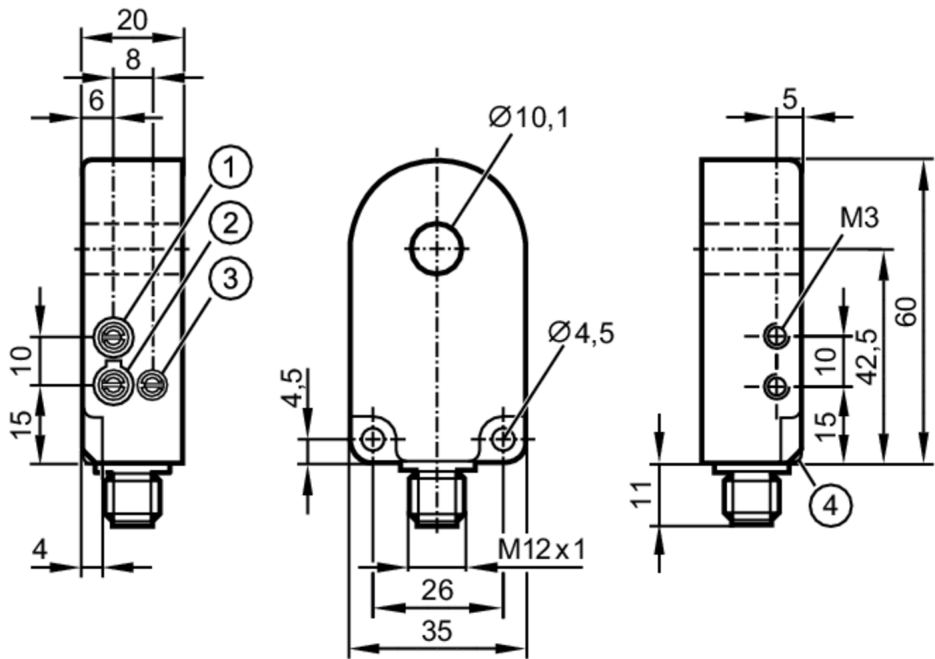

- 1 Sensitivity
- 2 Output function
- 3 Pulse stretching time



Product characteristics		
Electrical design		PNP
Output function		normally open / closed; (selectable)
Housing		circular
Dimensions	[mm]	60 x 35 x 20
Application		
Principle of operation		dynamic
Electrical data		
Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open / closed; (selectable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	200
Short-circuit protection		yes
Overload protection		yes

I7R203



Inductive ring sensor

I7R3010-FPKG/DY/US-100-IPF

Monitoring range		
Resolution of steel ball (diameter)	[mm]	0.6
Max. part speed	[m/s]	35
Reaction times		
Pulse stretching	[ms]	0.1...150
Pulse stretching adjustable		yes
Max. fall time	[ms]	0.2
Response time	[ms]	< 0.2
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67
Tests / approvals		
MTTF	[years]	556
UL approval	Ta	-25...70 °C
	Enclosure type	Type 4X (indoor use only) / 12 and 13
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight	[g]	60
Housing		circular
Dimensions	[mm]	60 x 35 x 20
Inside diameter	[mm]	10.1
Material		housing: PA; ring: POM
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		

Connector: 1 x M12; coding: A



I7R203



Inductive ring sensor

I7R3010-FPKG/DY/US-100-IPF

Connection

