


# IB5133



## Inductive sensor

IBE3030-FPKG

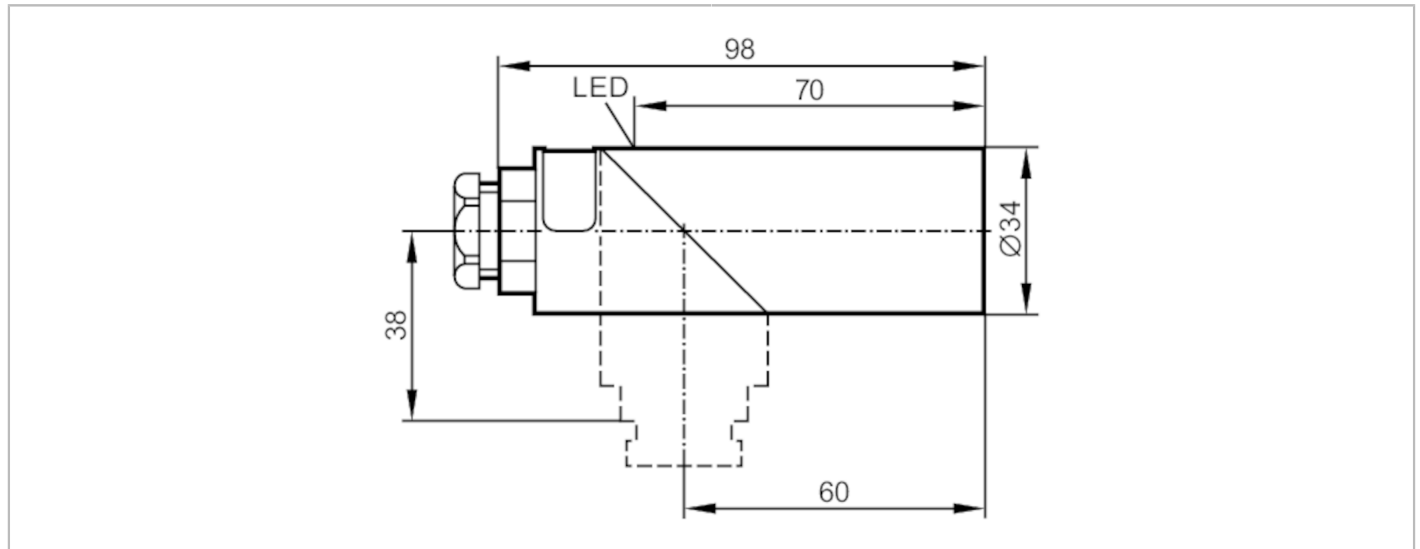

### Product characteristics

Electrical design	PNP
Output function	normally open / closed; (selectable)
Sensing range [mm]	30
Housing	tubular
Dimensions [mm]	Ø 34 / L = 98

### Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	yes

### Outputs

Electrical design	PNP
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	350
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

### Monitoring range

Sensing range [mm]	30
Real sensing range $S_r$ [mm]	$30 \pm 10 \%$
Operating distance [mm]	0...24.3

### Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.4 / copper: 0.3
-------------------	--

# IB5133



## Inductive sensor

IBE3030-FPKG

Switch-point drift	[% of Sr]	-10...10
--------------------	-----------	----------

### Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 65

### Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	1824

### Mechanical data

Weight	[g]	187
Housing		tubular
Mounting		non-flush mountable
Dimensions	[mm]	Ø 34 / L = 98
Material		PBT; bevelled housing part: PC

### Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

### Accessories

Items supplied		Mounting clamp: 1
----------------	--	-------------------

### Remarks

Pack quantity		1 pcs.
---------------	--	--------

### Electrical connection

terminals: ...2.5 mm<sup>2</sup>; Cable sheath: Ø 7...13 mm; Cable gland: M20 X 1.5

### Connection

