


# IE5072



## Inductive sensor

IEB3001-BPKG



### Product characteristics

|                    |                 |
|--------------------|-----------------|
| Electrical design  | PNP             |
| Output function    | normally open   |
| Sensing range [mm] | 1               |
| Housing            | Threaded type   |
| Dimensions [mm]    | M8 x 1 / L = 35 |

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 10...36 DC |
| Current consumption [mA]    | 15; (24 V) |
| Protection class            | III        |
| Reverse polarity protection | yes        |

### Outputs

|                                                      |               |
|------------------------------------------------------|---------------|
| Electrical design                                    | PNP           |
| Output function                                      | normally open |
| Max. voltage drop switching output DC [V]            | 2.5           |
| Permanent current rating of switching output DC [mA] | 200           |
| Switching frequency DC [Hz]                          | 750           |
| Short-circuit protection                             | yes           |
| Overload protection                                  | yes           |

### Monitoring range

|                            |          |
|----------------------------|----------|
| Sensing range [mm]         | 1        |
| Real sensing range Sr [mm] | 1 ± 10 % |
| Operating distance [mm]    | 0...0.8  |

### Accuracy / deviations

|                              |                                                                            |
|------------------------------|----------------------------------------------------------------------------|
| Correction factor            | steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2 |
| Hysteresis [% of Sr]         | 1...15                                                                     |
| Switch-point drift [% of Sr] | -10...10                                                                   |

### Operating conditions

|                          |          |
|--------------------------|----------|
| Ambient temperature [°C] | -25...80 |
| Protection               | IP 67    |


IE5072



Inductive sensor

IEB3001-BPKG

| Tests / approvals                         |                           |                                              |
|-------------------------------------------|---------------------------|----------------------------------------------|
| EMC                                       | EN 61000-4-2 ESD          | 4 kV CD / 8 kV AD                            |
|                                           | EN 61000-4-3 HF radiated  | 3 V/m                                        |
|                                           | EN 61000-4-4 Burst        | 2 kV                                         |
|                                           | EN 61000-4-6 HF conducted | 3 V                                          |
|                                           | EN 55011                  | class B                                      |
| MTTF                                      | [years]                   | 2804                                         |
| Mechanical data                           |                           |                                              |
| Weight                                    | [g]                       | 51.4                                         |
| Housing                                   |                           | Threaded type                                |
| Mounting                                  |                           | flush mountable                              |
| Dimensions                                | [mm]                      | M8 x 1 / L = 35                              |
| Thread designation                        |                           | M8 x 1                                       |
| Material                                  |                           | brass white bronze coated; sensing face: PBT |
| Tightening torque                         | [Nm]                      | A = 5 mm: 1 Nm; B: 2 Nm                      |
| Displays / operating elements             |                           |                                              |
| Display                                   | Switching status          | 1 x LED, yellow                              |
| Accessories                               |                           |                                              |
| Items supplied                            |                           | lock nuts: 2                                 |
| Remarks                                   |                           |                                              |
| Pack quantity                             |                           | 1 pcs.                                       |
| Electrical connection                     |                           |                                              |
| Cable: 2 m, PVC; 3 x 0.14 mm <sup>2</sup> |                           |                                              |
| Connection                                |                           |                                              |

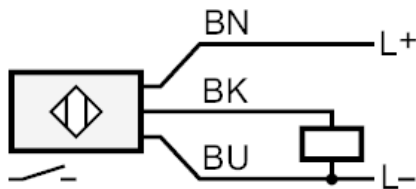

BN =

BU =

BK =

Core colors :  
brown  
blue  
black

# IE5072

## Inductive sensor

IEB3001-BPKG



### Diagrams and graphs

#### Installation

