


# IFS317



## Inductive sensor

IFK3010-APKG/K1/V4A/US-104

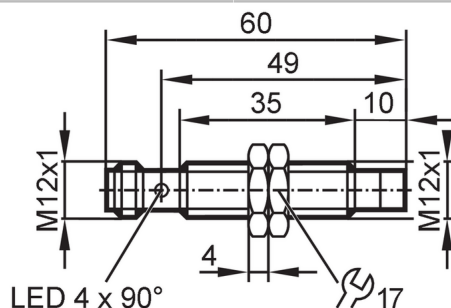

### Product characteristics

|                    |                  |
|--------------------|------------------|
| Electrical design  | PNP              |
| Output function    | normally closed  |
| Sensing range [mm] | 10               |
| Housing            | Threaded type    |
| Dimensions [mm]    | M12 x 1 / L = 60 |

### Application

|                                          |                                                                                                                                                            |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System                                   | gold-plated contacts; Increased sensing range; correction factor = 1; Magnetic-field immune                                                                |
| Application                              | material handling; refrigerated warehouse / shock freezing; Suitable for industrial, mobile, cooling and lubricating applications; Industrial applications |
| Magnetic-field immune                    | yes                                                                                                                                                        |
| Max. electromagnetic field immunity [mT] | 300                                                                                                                                                        |

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 10...30 DC |
| Current consumption [mA]    | < 20       |
| Protection class            | III        |
| Reverse polarity protection | yes        |

### Outputs

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Electrical design                                    | PNP             |
| Output function                                      | normally closed |
| Max. voltage drop switching output DC [V]            | 2.5             |
| Permanent current rating of switching output DC [mA] | 100             |
| Switching frequency DC [Hz]                          | 2000            |
| Short-circuit protection                             | yes             |
| Overload protection                                  | yes             |

### Monitoring range

|                            |           |
|----------------------------|-----------|
| Sensing range [mm]         | 10        |
| Real sensing range Sr [mm] | 10 ± 10 % |
| Operating distance [mm]    | 0...8.1   |
| Increased sensing range    | yes       |

# IFS317



## Inductive sensor

IFK3010-APKG/K1/V4A/US-104

| Accuracy / deviations                                                               |                                                                                                                       |                                                                                    |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Correction factor                                                                   | steel: 1 / stainless steel: 1 / brass: 1 / aluminum: 1 / copper: 1                                                    |                                                                                    |
| Hysteresis                                                                          | [% of Sr]                                                                                                             | 3...15                                                                             |
| Switch-point drift                                                                  | [% of Sr]                                                                                                             | -10...10                                                                           |
| Correction factor = 1                                                               | yes                                                                                                                   |                                                                                    |
| Operating conditions                                                                |                                                                                                                       |                                                                                    |
| Ambient temperature                                                                 | [°C]                                                                                                                  | -40...85                                                                           |
| Protection                                                                          | IP 65; IP 66; IP 67; IP 68; IP 69K                                                                                    |                                                                                    |
| Tests / approvals                                                                   |                                                                                                                       |                                                                                    |
| EMC                                                                                 | EN 61000-4-2 ESD                                                                                                      | 4 kV CD / 8 kV AD                                                                  |
|                                                                                     | EN 61000-4-3 HF radiated                                                                                              | 10 V/m                                                                             |
|                                                                                     | EN 61000-4-4 Burst                                                                                                    | 2 kV                                                                               |
|                                                                                     | EN 61000-4-6 HF conducted                                                                                             | 10 V                                                                               |
|                                                                                     | EN 55011                                                                                                              | class B                                                                            |
| Vibration resistance                                                                | EN 60068-2-6 Fc                                                                                                       | 20 g (10...3000 Hz) / 50 sweep cycles per frequency; 1 octave per minute in 3 axes |
| Shock resistance                                                                    | EN 60068-2-27 Ea                                                                                                      | 100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes   |
| Continuous shock resistance                                                         | EN 60068-2-27                                                                                                         | 40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes            |
| Fast temperature changes                                                            | EN 60068-2-14 Na                                                                                                      | TA = -40 °C; TB = 85 °C; t1 = 30 min; t2 = < 10 s; 50 cycles                       |
| Salt spray test                                                                     | EN 60068-2-52 Kb                                                                                                      | severity level 5 (4 test cycles)                                                   |
| MTTF                                                                                | [years]                                                                                                               | 659                                                                                |
| Embedded software included                                                          | yes                                                                                                                   |                                                                                    |
| UL approval                                                                         | UL approval number                                                                                                    | A005                                                                               |
| Mechanical data                                                                     |                                                                                                                       |                                                                                    |
| Weight                                                                              | [g]                                                                                                                   | 25.7                                                                               |
| Housing                                                                             | Threaded type                                                                                                         |                                                                                    |
| Mounting                                                                            | non-flush mountable                                                                                                   |                                                                                    |
| Dimensions                                                                          | [mm]                                                                                                                  | M12 x 1 / L = 60                                                                   |
| Thread designation                                                                  | M12 x 1                                                                                                               |                                                                                    |
| Material                                                                            | stainless steel (1.4404 / 316L); sensing face: LCP white; LED window: PEI; lock nuts: stainless steel (1.4404 / 316L) |                                                                                    |
| Displays / operating elements                                                       |                                                                                                                       |                                                                                    |
| Display                                                                             | Switching status                                                                                                      | 4 x LED, yellow                                                                    |
| Accessories                                                                         |                                                                                                                       |                                                                                    |
| Items supplied                                                                      | lock nuts: 2                                                                                                          |                                                                                    |
| Remarks                                                                             |                                                                                                                       |                                                                                    |
| Pack quantity                                                                       | 1 pcs.                                                                                                                |                                                                                    |
| Electrical connection - plug                                                        |                                                                                                                       |                                                                                    |
| Connector: 1 x M12; coding: A; Contacts: gold-plated                                |                                                                                                                       |                                                                                    |
|  |                                                                                                                       |                                                                                    |

## Inductive sensor

IFK3010-APKG/K1/V4A/US-104

### Connection



### Diagrams and graphs

#### Installation

