


IN5269



Inductive sensor

IN-2002-FRKG/AS-610-TRF

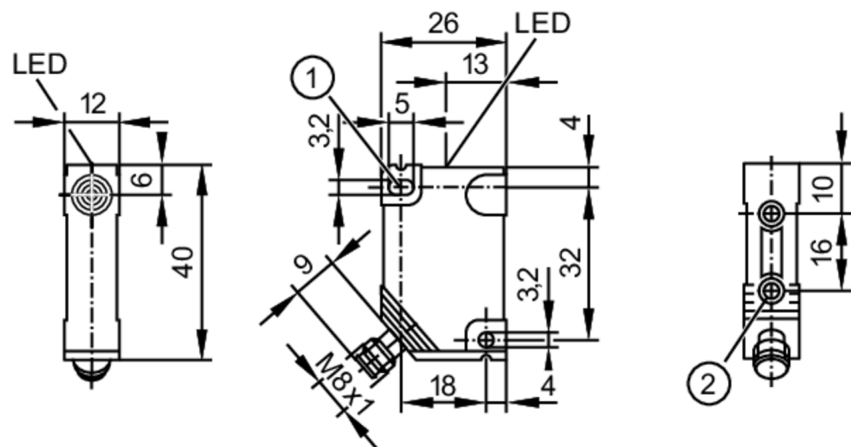

- 1 mounting hole
2 threaded bush M3 Depth 5.8 mm



Product characteristics

Electrical design	PNP/NPN
Output function	normally open / closed; (selectable)
Sensing range [mm]	2
Housing	rectangular
Dimensions [mm]	40 x 12 x 26

Electrical data

Operating voltage [V]	10...36 DC
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	4.6
Minimum load current [mA]	4
Max. leakage current [mA]	0.5
Permanent current rating of switching output DC [mA]	400
Switching frequency DC [Hz]	1300
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	2
Real sensing range Sr [mm]	2 ± 10 %
Operating distance [mm]	0...1.6

IN5269



Inductive sensor

IN-2002-FRKG/AS-610-TRF

Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15	
Switch-point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 65	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]	1773	
Mechanical data			
Weight	[g]	20.2	
Housing		rectangular	
Mounting		flush mountable	
Dimensions	[mm]	40 x 12 x 26	
Material		PBT	
Mounting hole			
Tightening torque	[Nm]	< 0.5	
Threaded bush			
Tightening torque	[Nm]	< 1.2; (when brass insert in contact with counterpart)	
Displays / operating elements			
Display		Switching status	1 x LED, red
Remarks			
Pack quantity		1 pcs.	

IN5269



Inductive sensor

IN-2002-FRKG/AS-610-TRF

Electrical connection - plug

Connector: 1 x M8; coding: A

