




Inductive sensor

ITB3002-BPKG/2M PVC



Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	2
Housing	tubular
Dimensions [mm]	Ø 6.5 / L = 19

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	20; (24 V)
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	no

Monitoring range

Sensing range [mm]	2
Real sensing range S_r [mm]	$2 \pm 10\%$
Operating distance [mm]	0...1.6

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2
Hysteresis [% of S_r]	< 15
Switch-point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...70
Protection	IP 67

IT5039



Inductive sensor

ITB3002-BPKG/2M PVC


Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]		1045
UL approval	Ta	0...40 °C
	voltage supply	Class 2
	File number UL	E174191

Mechanical data		
Weight [g]		57
Housing		tubular
Mounting		flush mountable
Dimensions [mm]		Ø 6.5 / L = 19
Material		housing: stainless steel; sensing face: PBT

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 2 m, PVC; 3 x 0.14 mm²	

Connection	
------------	--

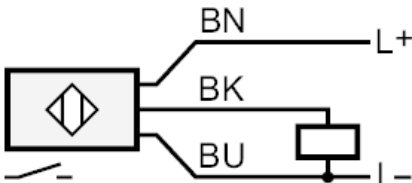

	Core colors :
BK =	black
BN =	brown
BU =	blue