


IY5047



Inductive sensor

IYB30,8-BPKG/V2A/0,3M/AS-610

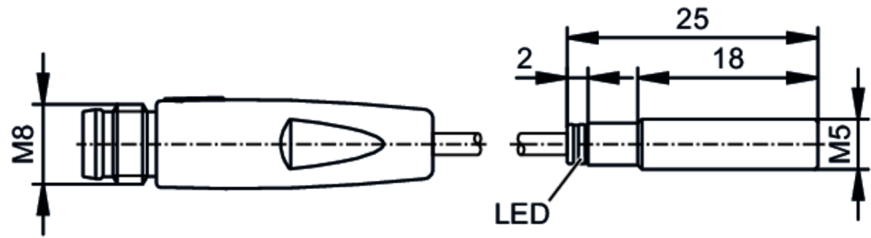

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	0.8
Housing		Threaded type
Dimensions	[mm]	M5 x 0.5 / L = 25
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Sensing range	[mm]	0.8
Real sensing range Sr	[mm]	0.8 ± 10 %
Operating distance	[mm]	0...0.65
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 65; IP 67

IY5047



Inductive sensor

IYB30,8-BPKG/V2A/0,3M/AS-610

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	2053

Mechanical data		
Weight	[g]	16.5
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M5 x 0.5 / L = 25
Thread designation		M5 x 0.5
Material		stainless steel (1.4305 / 303); sensing face: POM
Tightening torque	[Nm]	2

Displays / operating elements		
Display	Switching status	1 x LED, yellow

Accessories		
Items supplied		lock nuts: 2

Remarks		
Pack quantity		1 pcs.

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M8; coding: A; Locking: snap-fit




IY5047



Inductive sensor

IYB30,8-BPKG/V2A/0,3M/AS-610

Connection

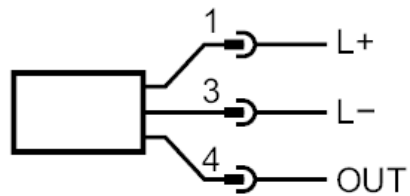

1	L+	
3	L-	
4	OUT	DO (NO)

DO: digital output; NO: normally open