


IZ5032



Inductive sensor

IZB30,8-ANKG/V2A

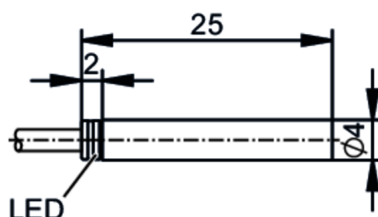

Product characteristics

Electrical design	NPN
Output function	normally open
Sensing range [mm]	0.8
Housing	tubular
Dimensions [mm]	Ø 4 / L = 25

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	NPN
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	0.8
Real sensing range S_r [mm]	$0.8 \pm 10\%$
Operating distance [mm]	0...0.65

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.2
Hysteresis [% of S_r]	1...15
Switch-point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...70
Protection	IP 65; IP 67

IZ5032



Inductive sensor

IZB30,8-ANKG/V2A

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	2162
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	A067
	File number UL	E174191


Mechanical data		
Weight	[g]	45.4
Housing		tubular
Mounting		flush mountable
Dimensions	[mm]	Ø 4 / L = 25
Material		stainless steel (1.4305 / 303); sensing face: POM

Displays / operating elements		
Display	Switching status	1 x LED ring, yellow translucent cable entry signals output status

Accessories		
Items supplied		Mounting clamp: 1

Remarks		
Pack quantity		1 pcs.

Electrical connection		
Cable: 2 m, PUR; 3 x 0.08 mm ²		
Connection		

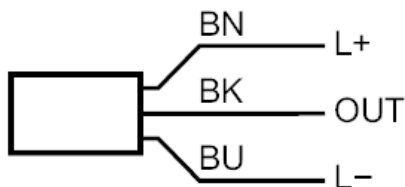

BN : brown
BK: black
BU: blue

BN L+
BK OUT DO (NO)
BU L-
DO: digital output; NO: normally open