


IZ5035



Inductive sensor

IZB30,8-BPKG/V2A/AS-514 RT

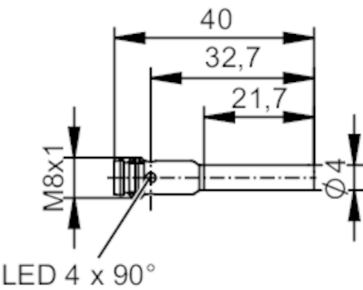

Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	0.8
Housing	tubular
Dimensions [mm]	Ø 4 / L = 40
Electrical data	
Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes
Monitoring range	
Sensing range [mm]	0.8
Real sensing range Sr [mm]	0.8 ± 10 %
Operating distance [mm]	0...0.65
Accuracy / deviations	
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10
Operating conditions	
Ambient temperature [°C]	-25...70
Protection	IP 65

IZ5035



Inductive sensor

IZB30,8-BPKG/V2A/AS-514 RT

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	1999
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	A053
	File number UL	E174191

Mechanical data		
Weight	[g]	13
Housing		tubular
Mounting		flush mountable
Dimensions	[mm]	Ø 4 / L = 40
Material		housing: stainless steel (1.4305 / 303); LED window: PA; sensing face: POM


Displays / operating elements		
Display	Switching status	4 x 90° LED, yellow

Accessories		
Items supplied		Mounting clamp: 1

Remarks		
Pack quantity		1 pcs.

Electrical connection - plug		
------------------------------	--	--

Connector: 1 x M8; coding: A



IZ5035



Inductive sensor

IZB30,8-BPKG/V2A/AS-514 RT

Connection

