


KG8502

Capacitive sensor

KGE3008BPKG/NI/US100DPS

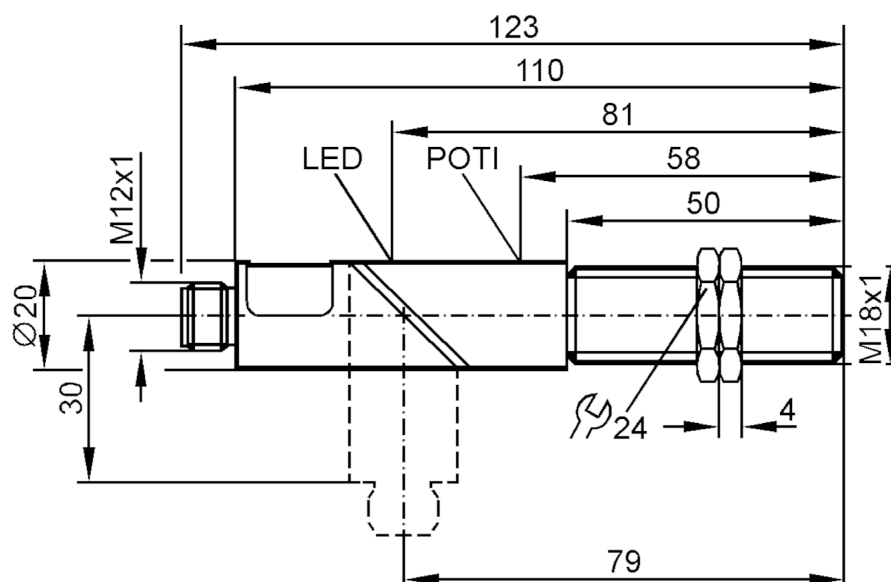

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	2.5...8
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 123

Electrical data

Operating voltage [V]	10...36 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	400
Switching frequency DC [Hz]	50
Short-circuit proof	yes
Overload protection	yes

Monitoring range

Sensing range [mm]	2.5...8
Sensing range adjustable	yes
Factory setting sensing range [mm]	8
Real sensing range Sr [mm]	8 ± 10 %
Operating distance [mm]	0...6.5

KG8502



Capacitive sensor

KGE3008BPKG/NI/US100DPS

Accuracy / deviations

Correction factor	glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2	
Hysteresis	[% of Sr]	3...15
Switch-point drift	[% of Sr]	-15...15

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 65

Mechanical data

Weight	[g]	72.575
Housing		Threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 123
Thread designation		M18 x 1
Material		PBT

Displays / operating elements

Display	Switching status	1 x LED, red
---------	------------------	--------------

Accessories

Items supplied	lock nuts: 2
	screwdriver: 1

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A



Connection

