


# KI5300



## Capacitive sensor

KI-3250NANKG/SL/1P/IO

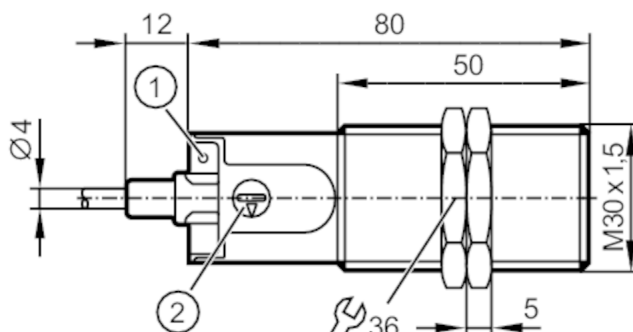

- 1 LED yellow Switching status  
2 potentiometer Sensing range



### Product characteristics

|                         |                    |
|-------------------------|--------------------|
| Electrical design       | NPN                |
| Output function         | normally open      |
| Sensing range [mm]      | 0.5...40           |
| Communication interface | IO-Link            |
| Housing                 | Threaded type      |
| Dimensions [mm]         | M30 x 1.5 / L = 92 |

### Application

|                         |           |
|-------------------------|-----------|
| Medium temperature [°C] | -25...110 |
|-------------------------|-----------|

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 10...30 DC |
| Current consumption [mA]    | < 22       |
| Protection class            | III        |
| Reverse polarity protection | yes        |

### Outputs

|                                                      |               |
|------------------------------------------------------|---------------|
| Electrical design                                    | NPN           |
| Output function                                      | normally open |
| Max. voltage drop switching output DC [V]            | 2.5           |
| Permanent current rating of switching output DC [mA] | 200           |
| Switching frequency DC [Hz]                          | 30            |
| Short-circuit protection                             | yes           |
| Overload protection                                  | yes           |

### Monitoring range

|                                    |           |
|------------------------------------|-----------|
| Sensing range [mm]                 | 0.5...40  |
| Sensing range adjustable           | yes       |
| Factory setting sensing range [mm] | 25        |
| Real sensing range Sr [mm]         | 25 ± 10 % |

### Accuracy / deviations

|                      |        |
|----------------------|--------|
| Hysteresis [% of Sr] | 1...15 |
|----------------------|--------|

# KI5300



## Capacitive sensor

KI-3250NANKG/SL/1P/IO

|                               |                                                                                                                                                                 |                                                                                     |  |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
| Switch-point drift            | [% of Sr]                                                                                                                                                       | -15...15                                                                            |  |
| Interfaces                    |                                                                                                                                                                 |                                                                                     |  |
| Communication interface       | IO-Link                                                                                                                                                         |                                                                                     |  |
| Transmission type             | COM2 (38,4 kBaud)                                                                                                                                               |                                                                                     |  |
| IO-Link revision              | 1.1                                                                                                                                                             |                                                                                     |  |
| SDCI standard                 | IEC 61131-9                                                                                                                                                     |                                                                                     |  |
| Profiles                      | Smart Sensor - SSP 0                                                                                                                                            | Generic Profiled Sensor                                                             |  |
|                               | Function                                                                                                                                                        | Device identification                                                               |  |
|                               | Function                                                                                                                                                        | Multiple switching signal                                                           |  |
|                               | Function                                                                                                                                                        | Process data variable                                                               |  |
|                               | Function                                                                                                                                                        | Device diagnosis                                                                    |  |
| SIO mode                      | yes                                                                                                                                                             |                                                                                     |  |
| Required master port class    | A                                                                                                                                                               |                                                                                     |  |
| Min. process cycle time       | [ms]                                                                                                                                                            | 20                                                                                  |  |
| IO-Link functions (acyclical) | application specific tag; operating hours counter; normally open / normally closed (configurable); PNP / NPN (parametrierbar); Switch point setting; Hysteresis |                                                                                     |  |
| Supported DeviceIDs           | Type of operation                                                                                                                                               | DeviceID                                                                            |  |
|                               | default                                                                                                                                                         | 688                                                                                 |  |
| Operating conditions          |                                                                                                                                                                 |                                                                                     |  |
| Ambient temperature           | [°C]                                                                                                                                                            | -25...80                                                                            |  |
| Protection                    | IP 65; IP 67; IP 69K                                                                                                                                            |                                                                                     |  |
| Tests / approvals             |                                                                                                                                                                 |                                                                                     |  |
| EMC                           | EN 61000-4-2                                                                                                                                                    | 30 kV AD / 4 kV CD                                                                  |  |
|                               | EN 61000-4-3                                                                                                                                                    | 10 V/m                                                                              |  |
|                               | EN 61000-4-4                                                                                                                                                    | 2 kV                                                                                |  |
|                               | EN 61000-4-6                                                                                                                                                    | 10 V                                                                                |  |
|                               | EN 55011                                                                                                                                                        | class B                                                                             |  |
| Vibration resistance          | DIN EN 60947-5-2                                                                                                                                                | 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz |  |
| Shock resistance              | DIN EN 60947-5-2                                                                                                                                                | 30 g 6 shocks / 11 ms half-sine (x, y, z)                                           |  |
| MTTF                          | [years]                                                                                                                                                         | 896.74                                                                              |  |
| UL approval                   | Ta                                                                                                                                                              | -25...60 °C                                                                         |  |
|                               | Enclosure type                                                                                                                                                  | Type 1                                                                              |  |
|                               | voltage supply                                                                                                                                                  | Limited Voltage/Current                                                             |  |
|                               | UL approval number                                                                                                                                              | D002                                                                                |  |
|                               | File number UL                                                                                                                                                  | E174191                                                                             |  |
| Mechanical data               |                                                                                                                                                                 |                                                                                     |  |
| Weight                        | [g]                                                                                                                                                             | 96.7                                                                                |  |
| Housing                       | Threaded type                                                                                                                                                   |                                                                                     |  |
| Mounting                      | non-flush mountable                                                                                                                                             |                                                                                     |  |
| Dimensions                    | [mm]                                                                                                                                                            | M30 x 1.5 / L = 92                                                                  |  |
| Thread designation            | M30 x 1.5                                                                                                                                                       |                                                                                     |  |
| Material                      | PBT; PC; POM                                                                                                                                                    |                                                                                     |  |
| Displays / operating elements |                                                                                                                                                                 |                                                                                     |  |
| Display                       | Switching status                                                                                                                                                | 1 x LED, yellow                                                                     |  |


# KI5300



## Capacitive sensor

KI-3250NANKG/SL/1P/IO

| Accessories                           |              |
|---------------------------------------|--------------|
| Items supplied                        | lock nuts: 2 |
| Remarks                               |              |
| Pack quantity                         | 1 pcs.       |
| Electrical connection                 |              |
| Cable: 2 m, PUR, Ø 4 mm; 3 x 0.34 mm² |              |
| Connection                            |              |

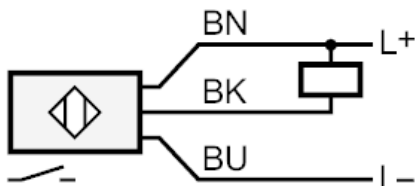

BK: OUT / IO-Link  
Core colors :  
BN = brown  
BU = blue  
BK = black