


L33600



Wirable plug

SSTGF030MSSFKPG

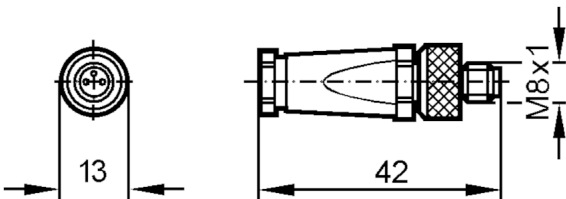

Application		
System		gold-plated contacts
Electrical data		
Operating voltage	[V]	< 60 AC / < 75 DC
Protection class		III
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 67
Mechanical data		
Weight	[g]	22.68
Dimensions	[mm]	13 x 13 x 42
Molded-body material		brass, nickel-plated
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

L33600



Wirable plug


SSTGF030MSSFKPG

Electrical connection

soldering: ...0.34 mm²; Cable sheath: Ø 3.5...5 mm

Electrical connection - plug

Connector: 1 x M8, straight; coding: A; Moulded body: brass, nickel-plated; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

