


L33602



Female wirable connectors

SDOGF030MSSFKPG

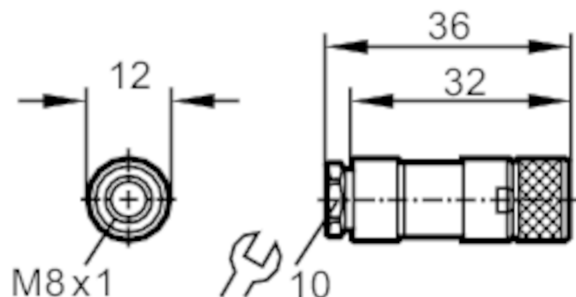

Application	
System	gold-plated contacts
Electrical data	
Operating voltage [V]	< 60 AC / < 75 DC
Protection class	III
Outputs	
Electrical design	PNP
Operating conditions	
Ambient temperature [°C]	-25...90
Protection	IP 67
Mechanical data	
Weight [g]	22.68
Dimensions [mm]	12 x 12 x 36
Molded-body material	brass, nickel-plated
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

L33602



Female wirable connectors

SDOGF030MSSFKPG

Electrical connection

soldering: ...0.34 mm²; Cable sheath: Ø 3.5...5 mm

Electrical connection - Socket

Connector: 1 x M8, straight; coding: A; Moulded body: brass, nickel-plated; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

