


MK5802



Cylinder sensor with IO-Link

MKC3028BFRKG/H/IO/0,3M/ZH/ASR

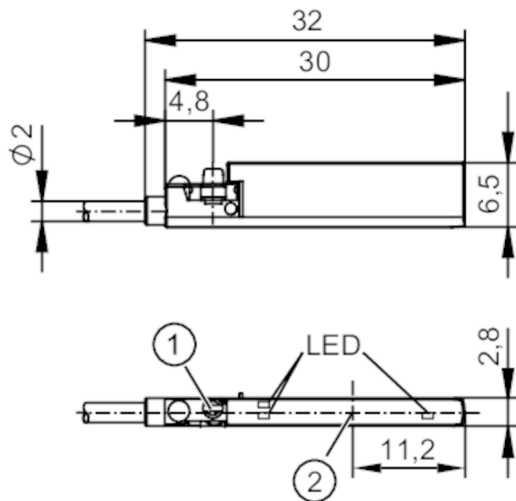

- 1 fixing element
- 2 sensing face



Product characteristics

Electrical design	PNP/NPN; (configurable)
Output function	normally open / closed; (configurable)
Communication interface	IO-Link

Application

Principle of operation	Hall sensor; (3D function)
------------------------	----------------------------

Electrical data

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1
------------------------------	------------------------------

Outputs

Output signal	switching signal; IO-Link	
Electrical design	PNP/NPN; (configurable)	
Number of digital outputs	1	
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]	2.5
Max. leakage current	[mA]	0.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	200
Type of short-circuit protection	yes (non-latching)	
Short-circuit proof	yes	

MK5802



Cylinder sensor with IO-Link

MKC3028BFRKG/H/IO/0,3M/ZH/ASR

Overload protection		yes	
Monitoring range			
Measuring range		[mm]	50; (depending on the application)
Min. field strength		[mT]	1
Accuracy / deviations			
Hysteresis		[mm]	1.25; (configurable)
Repeatability		[mm]	< 0.2
Linearity error IO-Link		[%]	< 5
Resolution		[mm]	0,01; (depending on the application)
Software / programming			
Parameter setting options		Switch points; Counter function; Diagnostic function	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1.3	
SDCI standard		IEC 61131-9 CDV	
Profiles		Smart Sensor - SSP 4.1.1	Measuring and Switching Sensor, 1 channel
		Common - I&D	Identification and Diagnosis
		Extension	Object detection, switches when value falls below the setpoint
		Function	Locator
		Function	ProductURI
SIO mode		yes	
Required master port class		A	
Min. process cycle time		[ms]	5
Supported DeviceIDs		Type of operation	DeviceID
		default	1612
Operating conditions			
Ambient temperature		[°C]	-25...85
Protection		IP 65; IP 67	
Tests / approvals			
EMC		EN 61000-4-2	- CD / 8 kV AD
		EN 61000-4-3	10 V/m
		EN 61000-4-4	2 kV
		EN 61000-4-6	10 V
		EN 55011	class B
Impact resistance		EN 60068-2-75 Ehc	1 J
Vibration resistance		EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles per frequency; 1 octave per minute in 3 axes
Shock resistance		EN 60068-2-27 Ea	30 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
MTTF		[years]	1362

MK5802



Cylinder sensor with IO-Link

MKC3028BFRKG/H/IO/0,3M/ZH/ASR

UL approval	Ta	-25...75 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	UL approval number	C020
	File number UL	E174191

Mechanical data		
Weight	[g]	12.6
Mounting		flush mountable
Type of mounting		clamping screw with head for slotted screwdriver
Cylinder type		C-slot cylinders
Material		housing: PA; Fastening clamp: stainless steel


Displays / operating elements		
Display	Switching status	2 x LED, yellow SSC1.1 SSC1.2
	Power	1x LED, green

Remarks	
Pack quantity	1 pcs.


Electrical connection

Cable: 0.3 m, Ø 2 mm; 3 x 0.08 mm²

Connector: 1 x M8; coding: A; with knurled nut



Connection

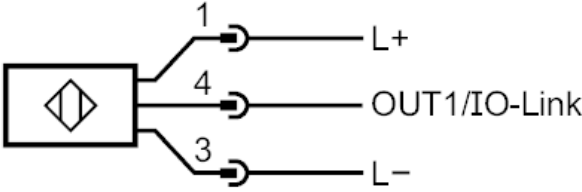

4: IO-Link / OUT1